

INLG32164KN

32 CHANNEL 4K NVR W/16 POE PORTS

- Supports H.265+ / H.265 / H.264 compression
- 32-Channel input
- Up to 12 Megapixels resolution recording
- HDMI and VGA simultaneous output
- 4 SATA HDDs, Up to 10TB for each HDD
- Plug & Play with 16 independent PoE network interfaces
- Supports cloud upgrade




Legend: Smarter, Stronger, Fully NDA Compliant

Unify your Security Solution

You asked, we listened. Tailored especially for you, Legend is our fully NDA compliant brand. It offers our latest technologies in a robust build with edge storage capacity. Legend by Inaxsys provides H.265+ compression and easy installation

Rear Panel

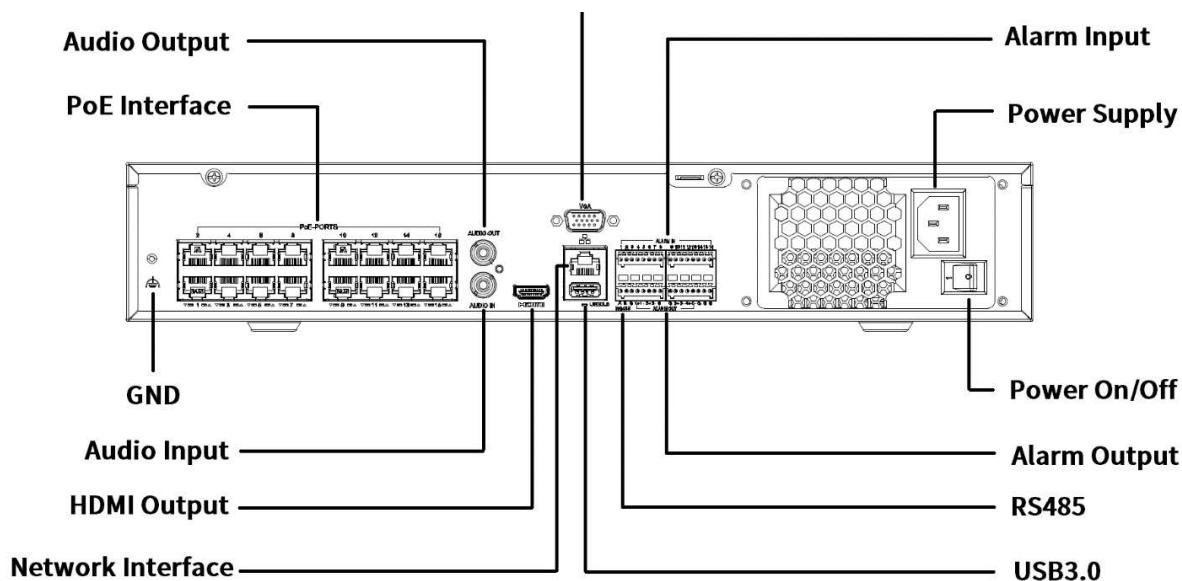

*Design and specifications are subjects to change without notice.


Decoding	
Format	Ultra 265, H.265, H.264
Capability	1 x 12MP@30, 2 x 4K@30, 5 x 4MP@30, 10 x 1080P@30, 22 x 720P@30, 32 x D1
Audio Compression	G.711A, G.711U
Network	
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS
Browser	IE(IE10/11) for Windows Firefox (version 52.0 and above) for Windows Chrome(version 45 and above) for Windows Edge(version 79 and above) for Windows
Video/Audio Output	
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
	HDMI: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
RCA Audio Output	1 channel, RCA
Liveview Display	1/4/6/8/9/16/25/36
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Video/Audio Input	
IP Video Input	32 channel
Two-way Audio	
Two-way Audio input	1 channel RCA
Snapshot	
FTP/Schedule/Event Snapshot	16-ch snapshot, up to 1080P resolution
Recording	
Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback in Local	16 channel
Smart	
VCA Detection by IPC	Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change, Detection, Object Left Behind, Object Removed, Auto Tracking
VCA Search	Behavior Search, Vehicle Search
People Counting	People Flow Counting, Crowd Density Monitoring
Smart by IPC	Total 8-ch
Alarm	
General Alarm	Motion, Tampering, Human Body Detection, Video Loss, Input Alarm, Audio Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline , Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal

*Design and specifications are subjects to change without notice.

Hard Disk	
SATA	4 SATA interfaces
Capacity	up to 10TB for each HDD
RAID	RAID 1,5
Disk Group	Supported
External Interface	
Ethernet	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
USB	Front panel: 1 x USB2.0,Rear panel: 1 x USB3.0
RS485 port	1
Alarm in	16 channel
Alarm out	4 channel
PoE	
Interface	16 RJ-45 10M/100M self-adaptive Ethernet Interface
Max Power	Max 30W for single port Max 150W in total
Supported Standard	IEEE 802.3af/at
General	
Power Supply	100~240V AC Power Consumption: ≤ 20 W (without HDD)
Working Temperature	-10°C~+ 55°C (+14°F~+131°F
Working Humidity	Humidity ≤ 90% RH (non-condensing)
Dimensions	
Weight	≤4Kg (8.82lb)
Dimensions	400mm × 363mm × 74mm (15.7" × 14.3"× 2.9"
Certification	
Certification	CE, FCC, UL, RoHS, WEEE
CE	EN 55032: 2015, EN 61000-3-3: 2013, EN IEC 61000-3-2: 2019, EN 55035: 2017
FCC	Part15 Subpart B, ANSI C63.4

*Design and specifications are subjects to change without notice.

Dimensions

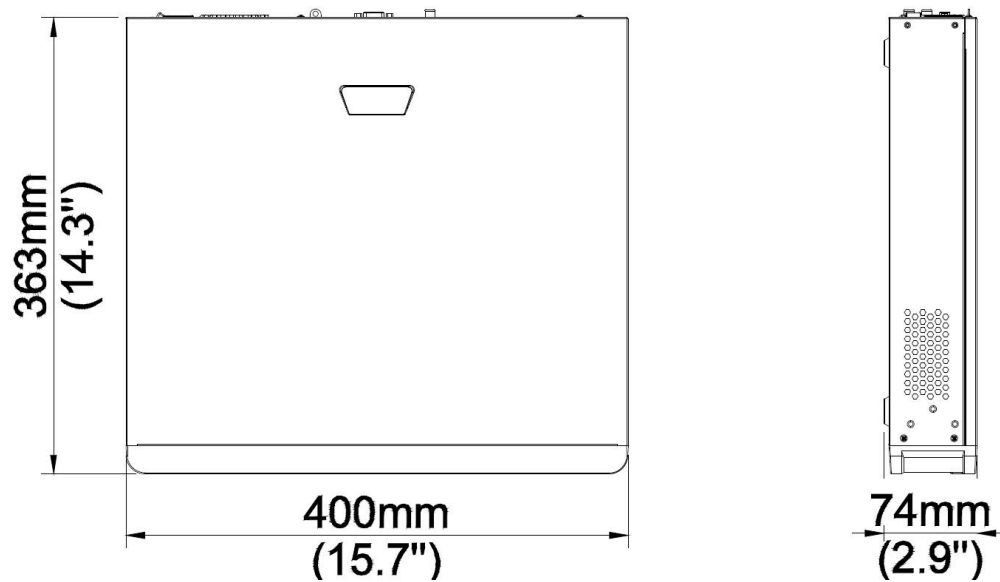

Ordering Informations

*Design and specifications are subjects to change without notice.