

# INLG324KN

## 32 Channel 4K NVR

- Supports H.265+ / H.265 / H.264 compression
- 32-Channel input
- Up to 12 Megapixels resolution recording
- Supports RAID 1, 5
- 4 SATA HDDs, Up to 10TB for each HDD
- ANR technology to enhance the storage reliability
- Supports cloud upgrade




**NDAA**  
Compliant

### Unify your Security Solution

You asked, we listened. Tailored especially for you, Legend is our **fully NDAA compliant brand**. It offers our latest technologies in a robust build. Legend by Inaxsys provides H.265+ compression, highly reliable device, crystal clear imaging, easy-to-use, this NVR is **suitable for residences and businesses**.

### Rear Panel

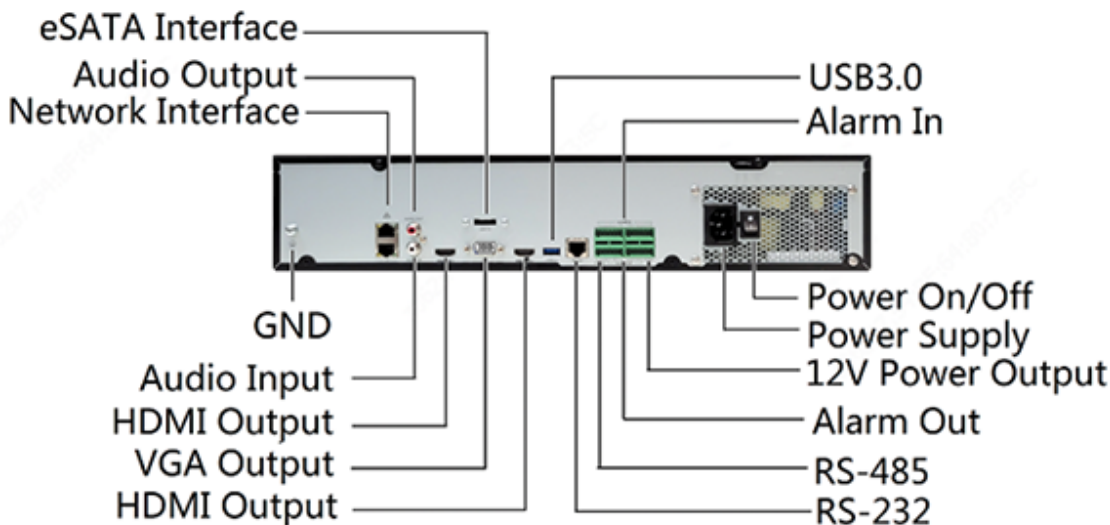

\*Design and specifications are subjects to change without notice.



# INLG324KN

## 32 Channel 4K NVR

## Product Specifications

System	
IP Video Input	32-Channel
Two-way Audio Input	1-Channel, RCA
Network	
Incoming Bandwidth	384Mbps
Outgoing Bandwidth	384Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE, TCP/IP, DNS, DDNS, SNMP, SMTP, NFS,
Video/Audio Output	
HDMI/VGA Output	HDMI: 3840 x 2160 at 30Hz; 1920 x 1080 at 60Hz; 1024 x 768 at 60Hz VGA: 1920 x 1080 at 60Hz; 1600 x 1200 at 60Hz; 1024 x 768 at 60Hz
Recording Resolution	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080p / 960p / 720p / D1 / 2CIF / CIF
Audio Output	1-Channel, RCA
Audio Compression	G.711A, G.711U
Real-time video display	1 / 4 / 6 / 8 / 9 / 16 / 25 / 36
Synchronous Playback	16-Channel
Corridor Mode Screen	3 / 4 / 5 / 7 / 9 / 10 / 12 / 16 / 32
Decoding	
Decoding Format	H.265+ / H.265 / H.264
Liveview/Playback	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080p / 960p / 720p / D1 / 2CIF / CIF
Capability	2 x 12MP at 30fps; 4 x 8MP at 30fps; 8 x 4MP at 30fps; 16 x 1080p at 30fps; 32 x 960p at 25fps
Hard Disk	
SATA	4 SATA interfaces
Capacity	up to 10TB for each disk
eSATA	1 eSATA interface
Disk Array	
Array Type	RAID 1, 5
Smart Features	
VCA Detection	Detecting human presence, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking, Object left behind, Object removed, Controlling vehicle movement
VCA Search	Searching for vehicles, Behavior search
Statistical Analysis	People counting
External Interface	
Network Interface	2 RJ45 10M / 100M / 1000M self-adaptive Ethernet Interfaces
USB Interface	Front panel: 2 x USB2.0; Rear panel: 1 x USB3.0
Serial Interface	1 x RS232, 1 x RS485
Alarm In	16-Channel
Alarm Out	4-Channel
General	
Power Supply	100 to 240 V AC / Power Consumption: Less than 25W (without HDD)
Working Environment	-10°C to +55°C; Less than 90% RH (non-condensing)
Dimensions (WxDxH)	442mm x 426mm x 89mm (17.4" x 16.8" x 3.5")
Weight (without HDD)	Less than 12.57lbs (5.7kg)

\*Design and specifications are subjects to change without notice.



# INLG324KN

32 Channel 4K NVR

## Product Specifications

Certifications	
Certifications	CE, FCC, UL, RoHS, WEEE
FCC	Part15 Subpart B, ANSI C63.4
CE	EN 55032: 2015, EN 61000-3-3: 2013, EN IEC 61000-3-2: 2019, EN 55035: 2017

\*Design and specifications are subjects to change without notice.

