

INLG644KN

64-Channel 4K NVR

- Supports H.265+ / H.265 / H.264 compression
- 64-Channel input
- Up to 12 Megapixels resolution recording
- Supports RAID 0, 1, 5, 6, 10
- 8 SATA HDDs, Up to 10TB for each HDD
- ANR technology to enhance the storage reliability
- Supports cloud upgrade




Legend: Smarter, Stronger, Fully NDA A Compliant

Unify your Security Solution

You asked, we listened. Tailored especially for you, Legend is our fully NDA A compliant brand.

It offers our latest technologies in a robust build with edge storage capacity. Legend by Inaxsys provides H.265+ compression and easy installation

Rear Panel

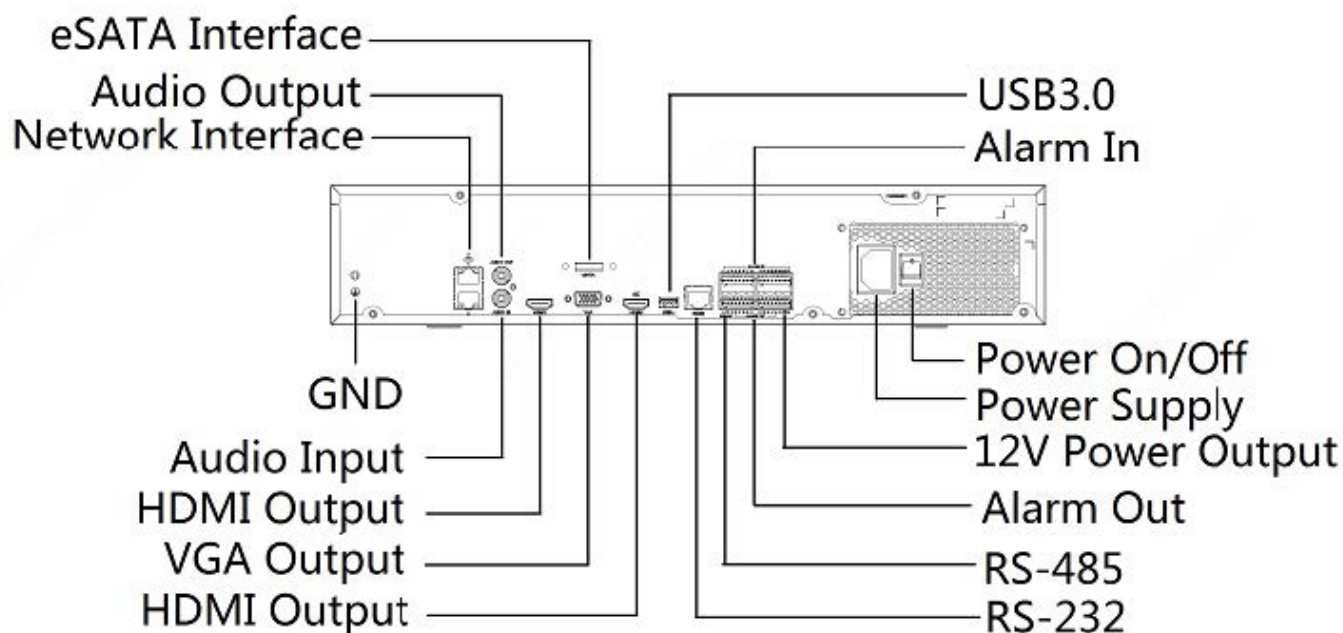

*Design and specifications are subjects to change without notice.


Decoding	
Format	Ultra 265, H.265, H.264
Capability	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1
Network	
Incoming Bandwidth	384Mbps
Outgoing Bandwidth	384Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
	HDMI1/HDMI2(HDMI audio output is not supported): 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
RCA Audio Output	1 channel RCA
Liveview Display	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Video/Audio Input	
IP Video Input	64 channel
Two-way Audio input	1 channel RCA
Audio Output	1 channel RCA
Recording	
Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback in Local	16-channel
Smart	
VCA Detection by IPC	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking, Object left behind, Object removed
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
Hard Disk	
SATA	8 SATA interfaces
Capacity	up to 10TB for each HDD
eSATA	1 eSATA interface
Disk Array	
Array Type	RAID 0, 1, 5, 6, 10
External Interface	
Ethernet	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
Serial Interface	1 x RS232, 1 x RS485

*Design and specifications are subjects to change without notice.

USB	Front panel: 2 x USB2.0,Rear panel: 1 x USB3.0
Alarm In	16 channel
Alarm Out	4 channel
Working Environment	
Working Temperature	-10°C~+ 55°C (+14°F~+131°F)
Working Humidity	Humidity ≤ 90% RH (non-condensing)
Power Consumption	≤ 25 W (without HDD)
Dimensions	
Weight	≤ 5.7Kg (12.57lb)
Dimensions	442mm ×426mm× 89mm (17.4"× 16.8"× 3.5")

*Design and specifications are subjects to change without notice.

Dimensions

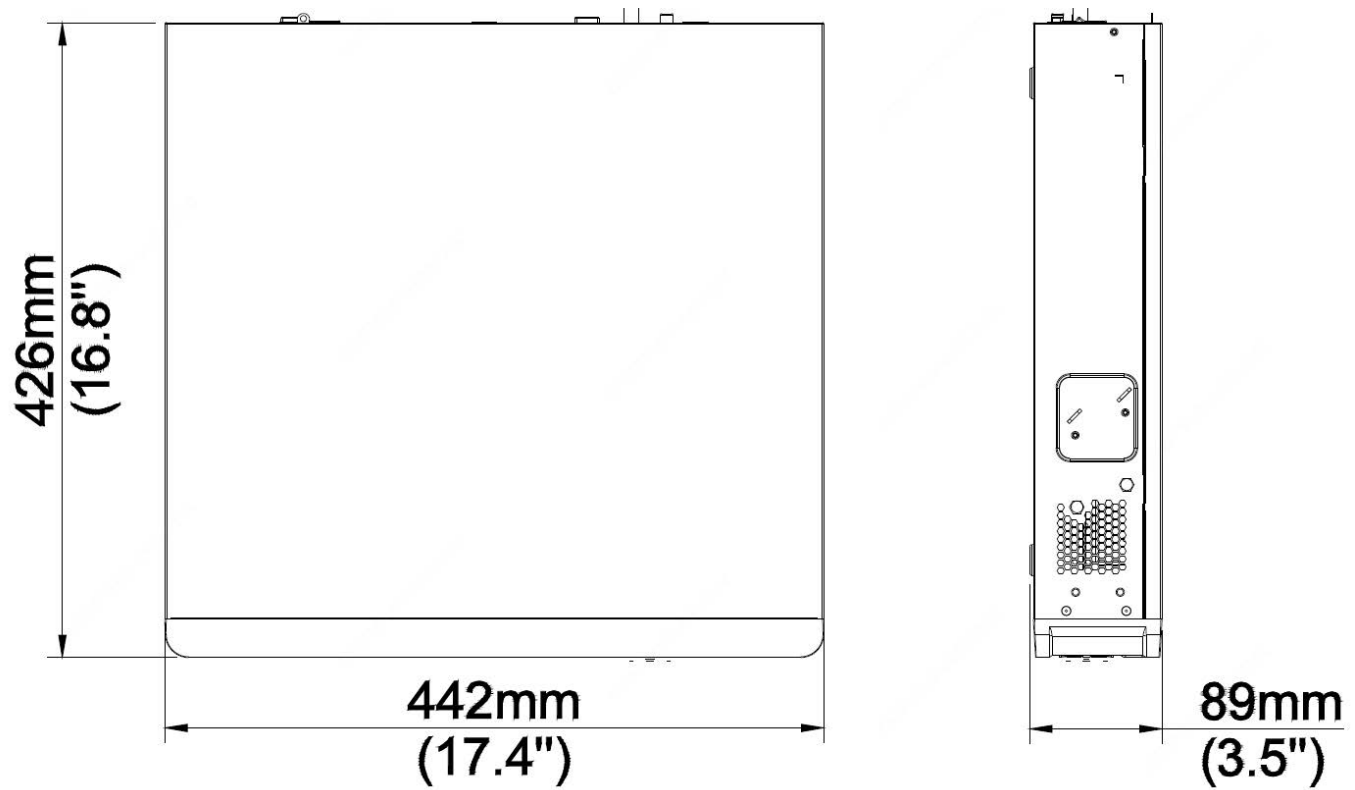

Ordering Informations

*Design and specifications are subjects to change without notice.