

INLG8814KN

8 Channel 4K NVR / 8 PoE

- Video Compression: H.265+ / H.265 / H.264or
- Channel Inputs: 8
- Max Recording Resolution: Up to 8 MP
- Video Outputs: HDMI and VGA (simultaneous)
- Storage: 1 × SATA HDD, up to 10 TB capacity
- Cloud Upgrade: Supported
- PoE: Built-in 8-port Plug & Play PoE switch




Legend: Smarter, Stronger, Fully NDA Compliant

Unify your Security Solution

You asked, we listened. Tailored especially for you, Legend is our fully NDA compliant brand. It offers our latest technologies in a robust build with edge storage capacity. Legend by Inaxsys provides H.265+ compression and easy installation

Rear Panel

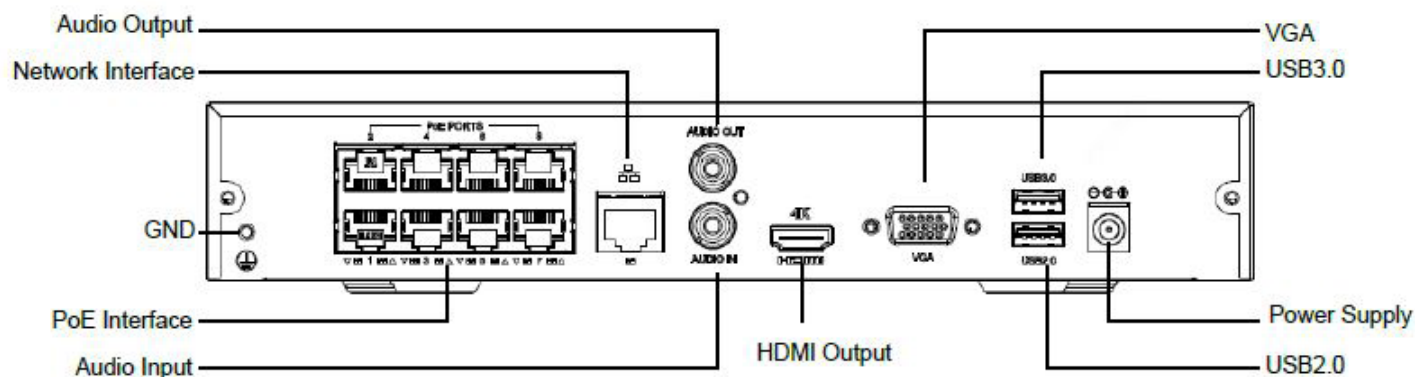

*Design and specifications are subjects to change without notice.


Decoding	
Format	Ultra 265/H.265/H.264
Capability	2 x 4k@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30, 16 x 720p@30
Network	
Incoming Bandwidth	64Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
RCA Audio Output	
Liveview Display	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Corridor Mode Screen	3/4/5/7/9
Video/Audio Input	
IP Video Input	8 channel
Two way Audio Input	1 channel
Snapshot	
FTP/Schedule/Event Snapshot	
Recording	
Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback in Local	8 channel
Smart	
VCA Detection by IPC	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene changedetection, Auto tracking
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
Hard Disk	
SATA	1 SATA interface
Capacity	up to 10TB for each disk
External Interface	
Ethernet	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB	Rear panel: 1 x USB2.0, 1 x USB3.0
Power Supply	52V DC

*Design and specifications are subjects to change without notice.

PoE	
Interface	8 independent 100 Mbps PoE network interfaces
Max Power	Max 30W for single port Max 108W in total (13.5W for each)
Supported Standard	IEEE 802.3at, IEEE 802.3af
Working Environment	
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F),
Working Humidity	Humidity ≤ 90% RH (non-condensing)
Power Consumption	≤8 W (without HDD)
Dimensions	
Weight	1kg (2.20 lb)
Dimensions	260mm × 240mm × 47mm (10.2"×9.4"×1.9")

*Design and specifications are subjects to change without notice.

Dimensions

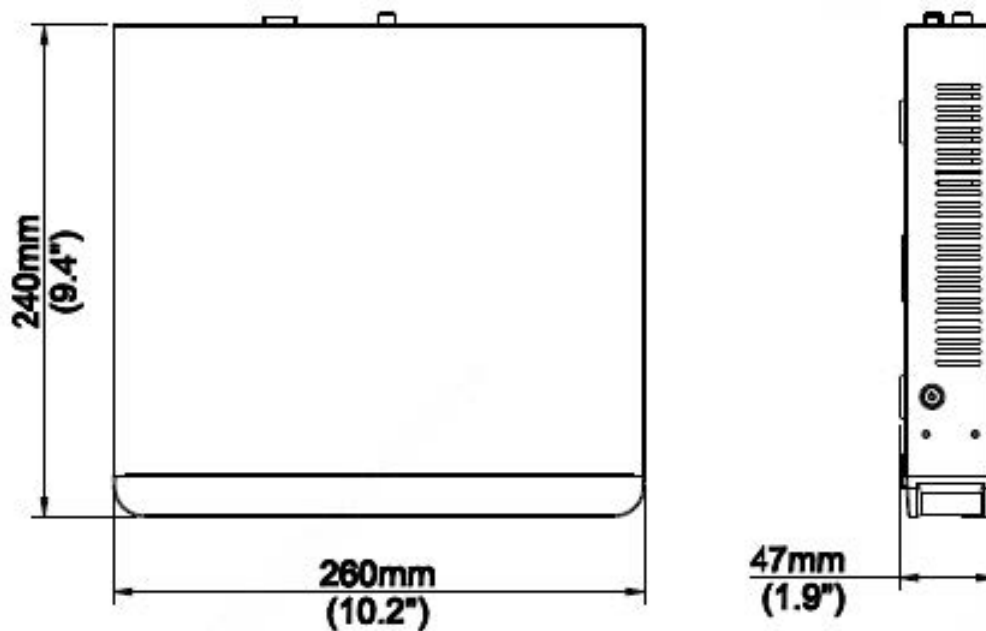

Ordering Informations

*Design and specifications are subjects to change without notice.