

INLGB02IRWF

2.1 MP Vandal Proof Fixed Bullet Network Camera w/IR, SD Slot

- High quality image with 2MP, 1/2.7" CMOS sensor
- True WDR (120 dB) to offer you the best image in the most demanding lighting conditions
- H.265+ & H.264 encoding
- Smart IR, Up to 30 m (98ft) IR distance
- Supports Micro SD Card, up to 128GB



**NDAA
Compliant**

Unify your Security Solution

You asked, we listened. Tailored especially for you, Legend is our **fully NDAA compliant brand**. It offers our latest technologies in a robust build with edge storage capacity. Legend by Inaxsys provides H.265+ compression and easy installation.

Smart H.265+ & H.264

LEGEND smart encoding technology provides high-quality video with higher efficiency and also reduces the cost of storage space and transmission bandwidth by adopting an advanced algorithm of auto stream control.

Wide Dynamic Range

This camera offers vivid imaging in any scenario. Using industry-leading WDR technology, you'll be able to capture the subject in the most difficult lighting conditions.



*Design and specifications are subjects to change without notice.



INLGB02IRWF

2.1 MP Vandal Proof Fixed Bullet Network Camera w/IR, SD Slot

Product Specifications

Camera					
Image Sensor		1/2.7"CMOS, 2 Mega Pixel			
Minimum Illumination		Colour: 0.01 lux (F2.0, AGC ON), 0 lux with IR			
Day/Night		IR-cut filter with auto switch ICR			
Electronic Speed Shutter		Auto/Manual, 1 ~ 1/100000s			
Pan/Tilt/Rotate		Pan: 0° ~ 360°	Tilt: 0° ~ 90°	Rotate: 0° ~ 360°	
WDR		120 dB			
S/N Ratio		More than 52 dB			
Illumination					
IR Range		Up to 30m/98ft			
Wavelength		850nm			
IR On & Off Control		Auto/Manual			
Lens					
Lens Type		Fixed			
Focal Length		2.8mm			
Viewing Angle (H, V, D)		H : 112.9°	V : 59.1°	D : 121.2°	
DORI					
DORI	Lens (mm)	Detect	Observe	Recognize	Identify
Distance	2.8	42m/137.8ft	16.8m/55.1ft	8.4m/27.6ft	4.2m/13.8ft
Video					
Compression		H.265+ / H.265 / H.264 / MJPEG			
H.264 code profile		Baseline profile, Main profile, High profile			
Frame Rate		Main Stream: 1080P (1920*1080), Max 30fps; 720P (1280*720), Max 30fps Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360 ,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps			
Video Bit Rate		128 Kbps~6144 Kbps			
On-Screen Display (OSD)		Up to 4 OSDs			
Privacy Mask		Up to 4 areas			
Region of Interest		Up to 8 areas			
Video Stream		Double			

*Design and specifications are subjects to change without notice.



INLGB02IRWF

2.1 MP Vandal Proof Fixed Bullet Network Camera w/IR, SD Slot

Product Specifications

Image	
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
Digital Noise Reduction	2D/3D DNR
Smart IR	Support
Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-Clockwise
Hightlight Compensation (HLC)	Support
Blacklight Compensation (BLC)	Support
Defog	Digital Defog
Events	
Basic Detection	Cross Line detection, Intrusion detection, Motion detection, Ultra motion detection, Tampering alarm, Audio detection
General Function	Watermark, IP address filtering, tampering alarm, alarm input, alarm output, access policy, ARP protection, RTSP authentication, user authentication
Audio	
Audio Compression	G.711U; G.711A
Audio Bit Rate	64 Kbps
Suppression	Support
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 128 GB
Network Storage	ANR, NAS (NFS)
Interface	
Built-in Mic	Yes
Ethernet	1 * RJ45 10M/100M Base-TX Ethernet

*Design and specifications are subjects to change without notice.



INLGB02IRWF

2.1 MP Vandal Proof Fixed Bullet Network Camera w/IR, SD Slot

Product Specifications

Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, SNMP
Compatibility	ONVIF (Profile S, Profile G, Profile T), API, SDK
User/Host	Up to 32 users. 2 user levels: administrator and common user
Security	Password protection, strong password, HTTPS encryption, Export operation logs, basic and digest authentication for RTSP, digest authentication for HTTP, TLS 1.2, WSSE and digest authentication for ONVIF
Management software	LEGEND VMS, ARKIV
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above
	Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above
Certifications	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035) FCC (FCC 47 CFR part 15 B)
Safety	CE LVD (EN 62368-1) CB (IEC 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
Environment	CE-RoHS (2011/65/EU; (EU)2015/863); WEEE (2012/19/EU);
Protection	IP67 (IEC 60529) 4KV (Surge Protection)
General	
Power	DC 12V±25%, PoE (IEEE 802.3af)
Power Consumption	Less than 7.0W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions (L x W x H)	165 × 63 × 62mm (6.5" × 2.5" × 2.5")
Weight	0.86lb / 0.39kg
Material	Metal + Plastic
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)

*Design and specifications are subjects to change without notice.




INLGB02IRWF

2.1 MP Vandal Proof Fixed Bullet
Network Camera w/IR, SD Slot

Product Specifications



XLGJB05-A
Junction Box



XLGUP06-B
Pole Mount






XLGUP06-C
Pole Mount



VUSD256G
Micro SD Card

4x $\varnothing 4.5\text{mm}$
(0.18")

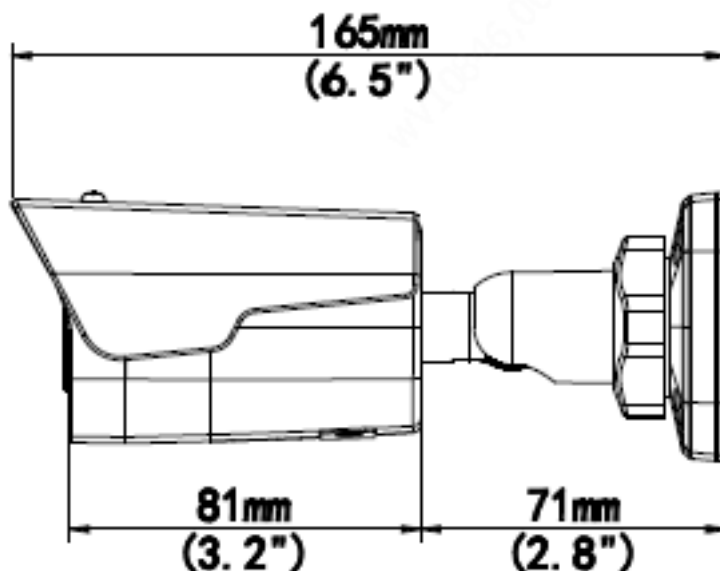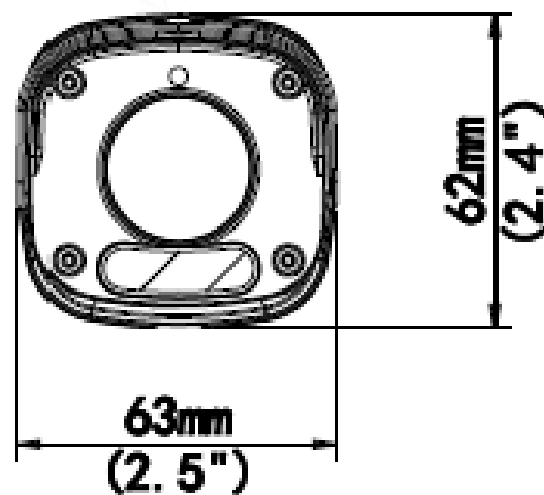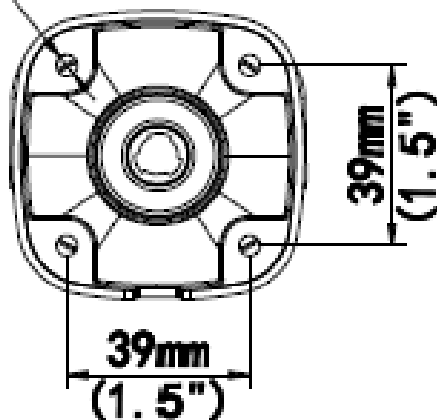

*Design and specifications are subjects to change without notice.

