

INLGB04IRA

4.1 MP Vandal Proof Motorized Lens Dome Network Camera w/IR, SD Slot

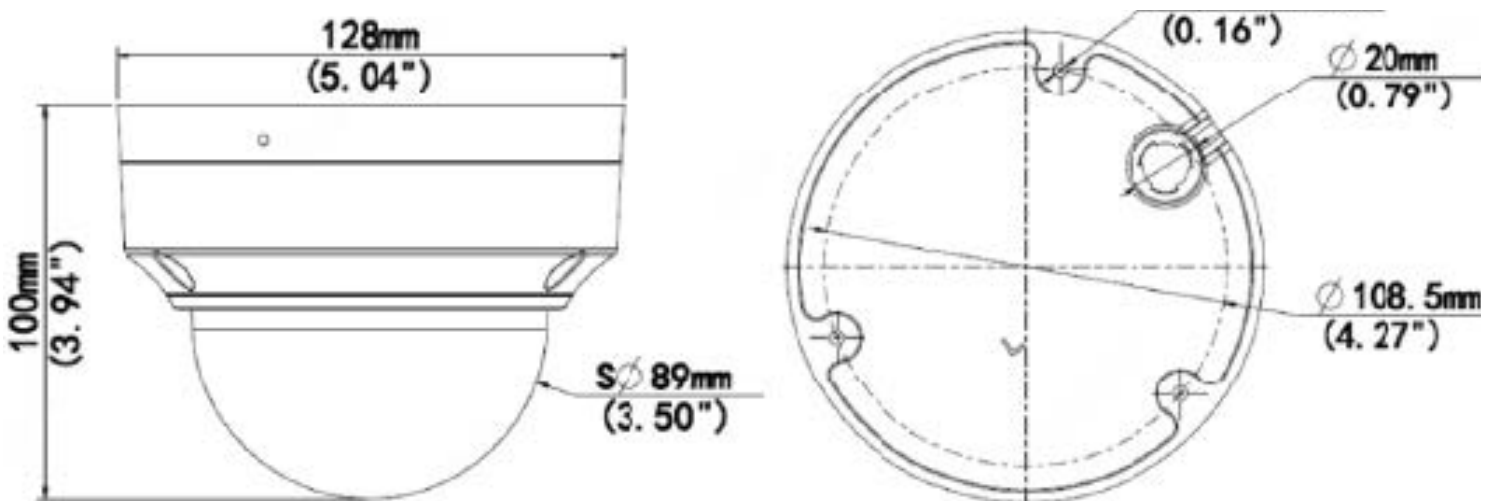
- Incredible 4MP Auto Focus Lens; ready-to-operate!
- H.265+ & H.264 encoding
- True WDR 120 db
- Smart IR, Up to 40 m (131ft) IR distance
- Increased infrared transmittance IR anti-reflection window
- Supports Micro SD Card, up to 256GB



Legend: Smarter, Stronger, Fully NDAA Compliant

The INLGB04IRA is a 4.1MP vandal-proof bullet camera with a motorized 2.8–12mm lens and a 1/3" CMOS sensor, delivering clear, high-quality images. It features Digital Wide Dynamic Range, Smart IR with up to 30m (98ft) night vision, supports H.265+ and H.264 encoding for efficient video compression, and includes a Micro SD slot for up to 256GB of local storage.

Dimensions



*Design and specifications are subjects to change without notice.

Camera					
Image Sensor		1/3.0"CMOS, 4 megapixel			
Minimum Illumination		Colour: 0.003 lux (F1.6, AGC ON), 0 lux with IR on			
Day/Night		IR cut filter with auto switch (ICR)			
Electronic Speed Shutter		Auto/Manual, 1 ~ 1/100000s			
Pan/Tilt/Rotate		Pan: 3° ~ 360°	Tilt: 0° ~ 70°	Rotate: 3° ~ 360°	
WDR		120 dB			
S/N Ratio		More than 56 dB			
IR Illumination					
IR Range		Up to 40m / 131ft			
Wavelength		850nm			
IR On & Off Control		Auto/Manual			
Lens					
Lens Type		2.8 ~ 12mm, AF automatic focusing and motorized zoom lens			
Focal Length		2.8mm ~ 12mm			
Viewing Angle (H, V, D)		H : 102.79°~ 30.86°	V : 54.50°~ 17.49°	D : 106.94°~35.49°	
DORI					
DORI Distance	Lens (mm)	Detect	Observe	Recognize	Identify
	2.8	63m/206.7ft	25.2m/82.7ft	12.6m/41.3ft	6.3m/20.7ft
	12 mm	270m/885.8ft	108m/354.3ft	54m/177.2ft	27m/88.6ft
Video					
Compression		H.265+ / H.265 / H.264 / MJPEG			
H.264 code profile		Baseline profile, Main profile, High profile			
Frame Rate		Main Stream: 4MP (2688*1520), Max 25fps; 4MP (2560*1440), Max 25fps; 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps			
		Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps			
Video Bit Rate		128 Kbps~16 Mbps			
On-Screen Display (OSD)		Up to 4 OSDs			
Privacy Mask		Up to 4 areas			
Region of Interest		Up to 8 areas			
Video Stream		Double			
Image					
White Balance		Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2			
Digital Noise Reduction		2D/3D DNR			

Smart IR	Supported
Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-Clockwise
Image Features	Hightlight Compensation, Blacklight Compensation, Digital Defog
Events	
Basic Detection	Cross Line detection, Intrusion detection, Motion detection, Ultra motion detection, Tampering alarm, Audio detection
General Function	Watermark, IP adress filtering, tampering alarm, alarm input, alarm output, access policy, ARP protection, RTSP authentication, user authentication
Audio	
Audio Compression	G.711U; G.711A
Audio Bit Rate	64 Kbps
Suppression	Supported
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 256GB
Network Storage	ANR, NAS(NFS)
Interface	
Built-in Mic	Yes
Ethernet	1 * RJ45 10M/100M Base-TX Ethernet
Network	
Protocols	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, QoS, 802.1x, SNMP, PPPoE
Compatibility	ONVIF (Profile S, Profile G, Profile T), API, SDK
User/Host	Up to 32 users. 2 user levels: administrator, common user and operator
Security	Password protection, strong password, HTTPS encryption, Export operation logs, basic and digest authentication for RTSP, digest authentication for HTTP, TLS 1.2, WSSE and digest authentication for ONVIF
Management software	LEGEND VMS, ARKIV
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above
	Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above
Certifications	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035), FCC (FCC 47 CFR part15 B, ANSI C63.4-2014)
Safety	CE LVD (EN 62368-1:2014+A11:2017); CB (IEC 62368-1:2014); UL (UL 62368-1, 2nd Ed., Issue Date: 2014-12-01)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)
Protection	IP67 (IEC 60529); IK10 (IEC 62262); 6KV (Surge Protection)

*Design and specifications are subjects to change without notice.


General	
Power	DC 12V±25%, PoE (IEEE 802.3af)
Power Consumption	Less than 7.5W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions (Ø x H)	128mmx100mm (Ø5.0" x 3.9")
Weight	1.43lb / 0.65kg
Material	Metal + Plastic
Working Environnement	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: 95% RH (non-condensing)
Reset Button	Supported

*Design and specifications are subjects to change without notice.

Accessories



XLGJB03-H
Junction Box



XLGJB07WM03-F
Wall Mount combo



XLGUP06
Pole Mount



XLGWM03-B
Wall Mount



XLGUC08-C
Corner Mounting
Bracket



XLGSE24
Pendant Mount



XLGCM24
Ceiling Mount








XLGSE24-A
Pendant Mount



VUSD256G
Micro SD Card

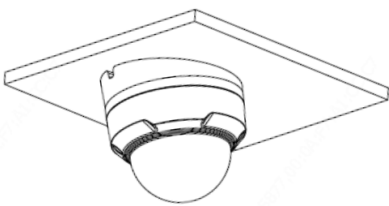Accessories Mount

Junction Mount XLGFM152-A 	Pole Mount XLGJB07WM03-G + XLGUP06 	Pendent Mount XLGJB03-G+XLGCM24 
Wall Mount XLGJB07WM03-G 	Tilted Mount XLGUM06-D 	

*Design and specifications are subjects to change without notice.