

# INLGDO4IRWFv2

## 4 MP Vandal Proof Fixed Dome Network Camera w/IR, SD Slot

- High quality image with 4MP, 1/3" CMOS sensor
- True WDR (120 dB) to offer you the best image in the most demanding lighting conditions
- H.265+ & H.264 encoding
- Smart IR, Up to 30 m (98ft) IR distance
- Supports Micro SD Card, up to 256GB



**NDAA  
Compliant**

### Unify your Security Solution

You asked, we listened. Tailored especially for you, Legend is our **fully NDAA compliant brand**. It offers our latest technologies in a robust build with edge storage capacity. Legend by Inaxsys provides H.265+ compression and easy installation.

### Smart H.265+ & H.264

LEGEND smart encoding technology provides high-quality video with higher efficiency and also reduces the cost of storage space and transmission bandwidth by adopting an advanced algorithm of auto stream control.

### Wide Dynamic Range

This camera offers vivid imaging in any scenario. Using industry-leading WDR technology, you'll be able to capture the subject in the most difficult lighting conditions.



\*Design and specifications are subjects to change without notice.



# INLGDO4IRWFv2

4 MP Vandal Proof Fixed Dome  
Network Camera w/IR, SD Slot

## Product Specifications

Camera					
Image Sensor		1/3", 4 Megapixel, progressive scan, CMOS			
Scanning System		Progressive			
Electronic Shutter Speed		Auto/Manual, 1~1/100,000 s			
Minimum Illumination		Color: 0.01 Lux (F2.0, AGC On); 0 Lux with IR on			
S/N Ratio		More than 56dB			
IR Distance		Distance up to 30m (98ft)			
Camera Features					
Day/Night		IR-cut filter with auto switch (ICR)			
Backlight Compensation		Supported			
White Balance		N/A			
Noise Reduction		2D/3D DNR			
Features		HLC; BLC; WDR 120dB			
Privacy Masking		Up to 4 areas			
OSD		Up to 4 OSDs			
Region of Interest		Up to 2 areas			
Motion Detection		Up to 4 areas			
Lens					
Lens Type		Fixed Lens			
Focal Length		2.8mm			
Max. Aperture		N/A			
Viewing Angle		H: 107.8°; V: 57°; O: 140.1°			
Iris Type		N/A			
Pan/Tilt/Rotate		Pan: 3° ~ 360°; Tilt: 0 ~ 68°; Rotate: 3 ~ 360°			
DORI	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
Distance	2.8	63.0	25.2	12.6	6.3
Video					
Compression		H.265+, H.265, H.264, MJPEG			
H.264 code profile		Baseline Profile, Main Profile			
Frame Rate		Main Stream: 4MP (2592x1520), Max 30fps; 4MP (2560x1440), Max 30fps; 3MP (2304x1296), Max 30fps; 1080P (1920x1080), Max30fps Sub Stream: 4CIF (704x576), Max 30fps; Third Stream: CIF (352x288), Max 30fps			
Storage					
Edge Storage		Micro SD card, up to 256GB			

\*Design and specifications are subjects to change without notice.



# INLGDO4IRWFv2

## 4 MP Vandal Proof Fixed Dome Network Camera w/IR, SD Slot

### Product Specifications

Network	
Ethernet	1 RJ45 10M/100M Base-TX Ethernet
Protocol	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL
Compatibility	ONVIF (Profile S, Profile G, Profile T), API
Interface	
Audio In/Out	Input: impedance 35kΩ; amplitude 2V [p-p] Output: impedance 600Ω; amplitude 2V [p-p]
Alarm In/Out	1/1
Audio	
Audio Compression	G.711
Two-way audio	Supported
Suppression	Supported
Sampling Rate	8KHz
General	
Power Supply	DC 12V±25%, PoE (IEEE 802.3af)
Power Consumption	Less than 5.5W
Working Environment	-30°C to 60°C (-31°F to 140°F) / Less than 95% RH
Protection	IP67; IK10
Weight	0.45kg
Dimensions	Φ108.7 x 81.1mm (Ø4.3" x 3.2")

\*Design and specifications are subjects to change without notice.



# INLGDO4IRWFv2

4 MP Vandal Proof Fixed Dome  
Network Camera w/IR, SD Slot

## Product Specifications



**XLGUP06**  
Pole Mount



**XLGJB03-G**  
Junction Box



**XLGA01**  
Waterproof Joint



**XLGCM24**  
Ceiling Mount



**XLGWM03-D**  
Wall Mount



**XLGJB07WM03-G**  
Wall Mount



**XLGSE24-A**  
Pendant Mount



**XLGSE24**  
Pendant Mount



**VUSD256G**  
Micro SD Card



**XLGUM06**  
Incline Mount

\*Design and specifications are subjects to change without notice.




# INLGDO4IRWFv2

4 MP Vandal Proof Fixed Dome  
Network Camera w/IR, SD Slot

## Product Specifications

### Junction Mount

XLGJB03-G





### Pole Mount

XLGJB07WM03-G



### Ceiling Mount

XLGCM24 + XLGJB03-G

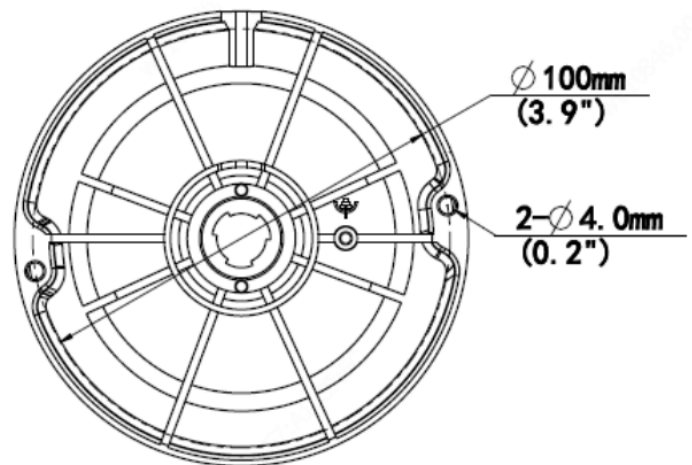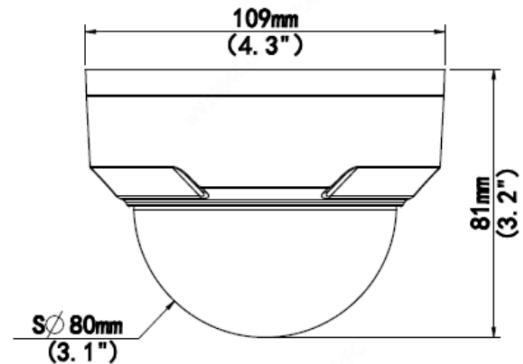

\*Design and specifications are subjects to change without notice.

