

INLGT04KIRWA

8.1 AI MP Vandal Proof Motorized Lens Turret Camera with IR, 2.8 - 12mm


- High quality image with 8MP, 1/2.8" CMOS sensor
- 120dB True WDR technology
- H.265+ & H.264 encoding
- Intelligent People Flow Counting and Crowd Density Monitoring
- Built-in Microphone
- Smart IR, up to 40m (131.2ft) IR distance
- Supports Micro SD card up to 512GB



Legend: Smarter, Stronger, Fully NDA Compliant

The **INLGT04KIRWA** is a 8.1MP turret camera featuring a 1/2.8" CMOS sensor, 120dB True WDR, and efficient H.265+/H.264 encoding for exceptional clarity in any lighting condition. It includes a built-in microphone, Smart IR with up to 40m (131.2ft) range, and supports a Micro SD card of up to 512GB for extended local recording.

Dimensions

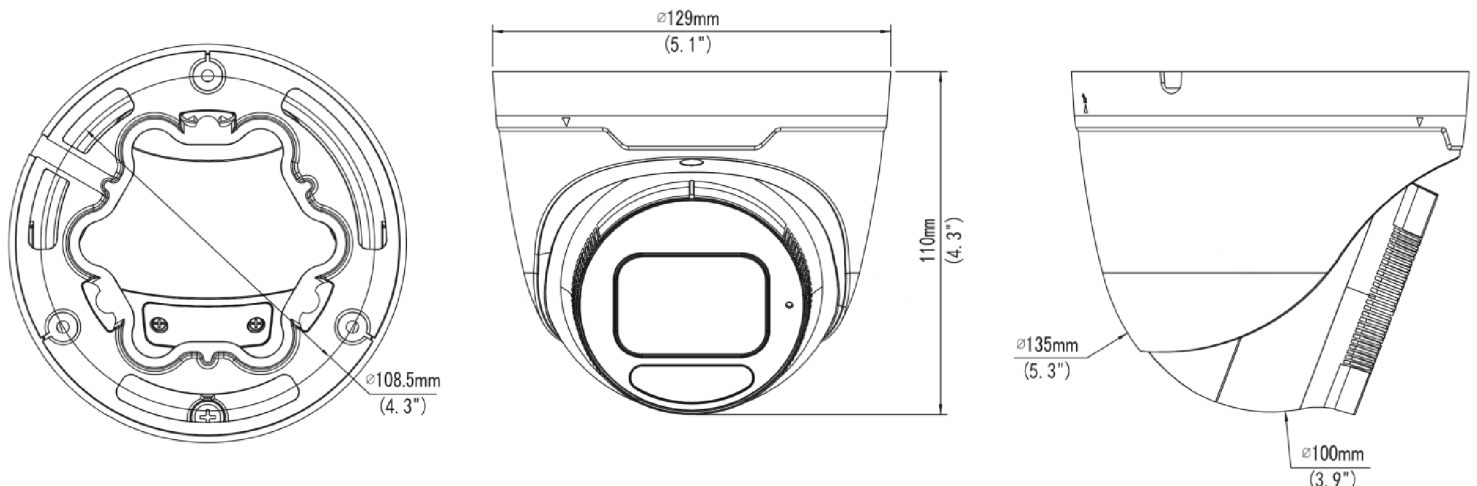

*Design and specifications are subject to change without notice.

Camera					
Image Sensor	1/2.8", 8.0 megapixel, CMOS				
Minimum Illumination	Colour: 0.0025 Lux (F1.6, AGC ON), 0 Lux with IR				
Day/Night	IR-cut filter with auto switch (ICR)				
Electronic Speed Shutter	Auto/Manual, 1 ~ 1/100000s				
Pan/Tilt/Rotate	Pan: 0° ~ 360°	Tilt: 0° ~ 75°	Rotate: 0° ~ 360°		
WDR	120 dB				
S/N Ratio	More than 52 dB				
Illumination					
IR Range	Up to 40m/131.2ft				
Wavelength	850nm				
IR On & Off Control	Auto/Manual				
Lens					
Focal Length	2.8 ~ 12 mm				
Iris Type	Fixed				
Lens Type	Motorized				
Iris	F1.6				
Viewing Angle (H, V, D)	H : 107.4° ~ 29.2°	V : 54.2° ~ 16.3°	D : 111° ~ 33.1°		
DORI					
DORI Distance	Lens (mm)	Detect	Observe	Recognize	Identify
	2.8	86.9 m /285.1ft	34.8m /114.2ft	17.4m /57.1ft	8.7m /28.5ft
	12	372.4m /1121.8ft	149.0m /488.8ft	74.5m /244.4ft	37.2m /112.0ft
Video					
Compression	H.265+ / H.265 / H.264 / MJPEG				
H.264 code profile	Baseline profile, Main profile, High profile				
Frame Rate	Main Stream: 8 MP (3840 × 2160), max. 20 fps; 5 MP (3072 × 1728), max. 30 fps; 4 MP (2560 × 1440), max. 30 fps; 1080P (1920 × 1080), max. 30 fps Sub Stream: 1080P (1920 × 1080), max. 30 fps; 720P (1280 × 720), max. 30 fps; D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps Third Stream: D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps				
Video Bit Rate	128 Kbps~16 Mbps				
On-Screen Display (OSD)	Up to 8 OSDs				
Privacy Mask	Up to 4 areas				
Region of Interest	Supported				
Video Stream	Triple				

*Design and specifications are subject to change without notice.

U-code	Supported
Image	
White Balance	Auto / Outdoor / Fine Tune / Sodium Lamp / Locked / Auto2
Digital Noise Reduction	2D/3D DNR
Flip	Normal / Vertical / Horizontal / 180° / 90° Clockwise / 90° Counterclockwise
Image Features	Smart IR, Highlight Compensation, Backlight Compensation, Digital Defog, Dewarping
Intelligence	
People Counting	Support people flow counting and crowd density monitoring
Smart Intrusion Prevention	Cross line detection, intrusion detection, enter area detection, leave area detection (support false alarm filtering and the classification of human, non-motor vehicle and vehicle)
Events	
Basic Detection	Motion detection, Ultra motion detection, Tampering alarm, Audio detection
General Function	Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication
Audio	
Audio Compression	G.711U, G.711A
Audio Bit Rate	64 Kbps
Sampling Rate	8KHZ
Audio Features	Suppression
Storage	
Edge Storage	Micro SD, up to 512GB
Network Storage	ANR, NAS (NFS)
Interface	
Ethernet	1*RJ45 10M/100M Base-TX Ethernet
Built-in Features	Built-in Mic
Network	
Protocols	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, 802.1x, SNMP, SSH
Compatibility	ONVIF (Profile S, Profile G, Profile T, Profile M), API, SDK
User/Host	Up to 32 users with 3 users levels: administratir, common user and operator
Security	Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF
Management Software	LEGEND VMS, ARKIV
Web Browser	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+ Plug-in free live view: Chrome 57+, Firefox 58+, Edge 16+
Certifications	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035) FCC (FCC 47 CFR part15 B)

*Design and specifications are subject to change without notice.


Safety	CE LVD (EN 62368-1) CB (IEC 62368-1)UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU)
Protection	IP67 (IEC 60529), IK10 (IEC 62262), 6KV (Surge Protection)
General	
Power	DC 12V±25%, PoE (IEEE 802.3af)
Power Consumption	Less than 9.0W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions (Ø x H)	Φ129 x 143.6mm / Φ5.1" x 5.7"
Weight	0.69kg / 1.52lb
Material	Metal
Working Environnement	-30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
Reset Button	Supported

*Design and specifications are subject to change without notice.


Accessories




XLGJB03-H
Junction Box

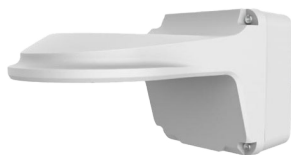

XLGJB07WM03-F
Wall Mount and
Junction Box



XLGWM03-B
Wall Mount

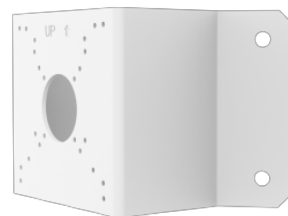

XLGUC08-C
Corner Mount



XLGUP06
Pole Mount



XLGA01
Plastic Waterproof
Joint



XLGSE24
Fixed Dome Pendant
Mount Pole 8 inch



XLGSE24-A
Fixed Dome Pendant
Mount Pole 20 inch



XLGCM24
Pendant Ceiling Mount

*Design and specifications are subject to change without notice.