



INSTS5CE - Center Module

INSTS5SI - Single Module L/R

| Swing Turnstile

Unify your Security Solution

In a highly fragmented industry, we have grown to become more than just a manufacturer. Time being our clients' more precious asset, we've adapted our methods and business structure to provide them with the best and simplest experience to ensure the protection of people, information and assets.

Accuracy

Live face detection, the face recognition as an 1% margin of error, Live face detection eliminates "photos", 0.6 second pass, the fastest in the industry

Durability


5 security level design, multiple scenarios, high performance

Safety

10 pairs of infrared + light curtain design, Anti-pinch



Park/apartment

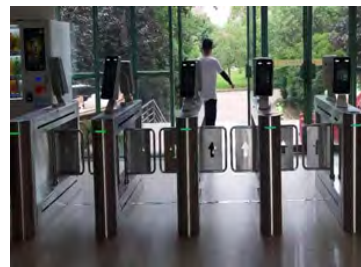

School/office




Factory

Technical Specifications

Technical Specification	
Motor Type	Brushed DC Motor
IR Signal	10 pair of IR detectors
Anti-collision	Yes
Facial Database	Yes
Anti-trailing	Yes
Second Unlock	Yes
Climbing Alarm	Yes
Stay Overtime Alarm	Yes
Intrusion Alarm	Yes
Unlock/Lock Speed	1.0 s - adjustable
Auto Lock Duration	5 s
Waterproof	Up to 18 cm deep
Lock Delay Duration	0 s to 60 s - adjustable
Passing Frequency	20 to 30 person per minute
Passage Width	Standard: 600 mm; maximum custom passage width: 1100 mm
Gross Weight	One-motor module turnstile: 95 kg (209.44 lb) two-motor module turnstile: 145 kg (319.67 lb)
Power Supply	AC 100V-240V, 50/60Hz
Power Consumption	One-motor module turnstile: 50 W; two-motor module turnstile: 100 W
Operating Temperature	-30°C to +70°C (-22°F to +158°F) (When operating temperature is below 0°C, heating module is needed.)
Product Dimension	1500 mm × 220 mm × 980 mm (59.06" × 8.66" × 38.58")
Cabinet Material	1.2mm SUS304
Certifications	CE, FCC

Dimensions

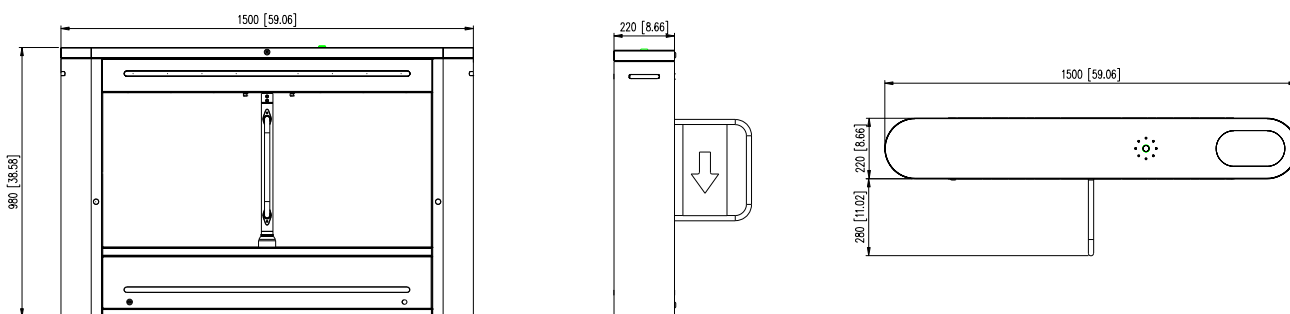

Application

