


LGNXD04KIQWA

4K High IQ Motorized Lens Dome Network Camera



- **High-definition imaging with an 8.1 MP resolution**
- **Classification of human and vehicle targets through intelligent analysis**
- **High IQ: Extreme AI analytics**
- **IR illumination up to 50 m**
- **IP67 protection and IK10 vandal resistance**
- **Built-in microphone with audio and alarm interfaces**

Dimensions

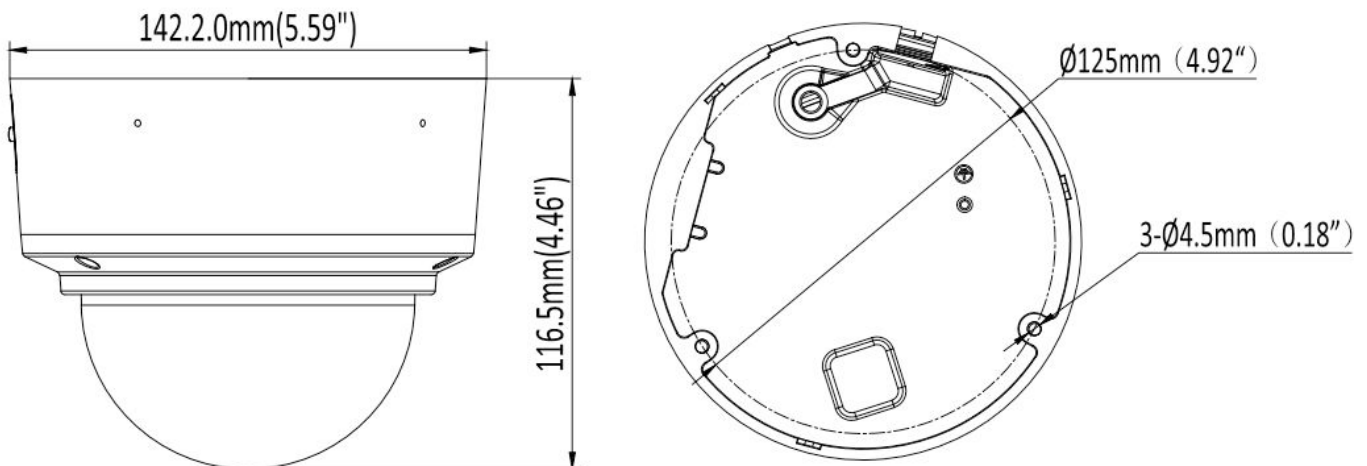

*Design and specifications are subject to change without notice - Version 2026-01-23

LGNXD04KIQWA - 4K High IQ Motorized Lens Dome Network Camera

Camera

Image Sensor

1/2.8" Progressive Scan CMOS

Minimum Illumination

Color: 0.006 lux; 0 lux with IR on

Illumination Distance

IR: up to 50 m

Smart IR

Supported

Strobe Light

Supported

Pan / Tilt / Rotation

0° to 355° / 0° to 75° / 0° to 355°

Lens

Focal Length

2.7 ~ 13.5 mm

Aperture

F1.6

Field of View

HORIZONTAL : 108° to 34°

VERTICAL : 58° to 19°

DIAGONAL : 130° to 39°

Mount

Φ14

DORI

Detection

93 - 274 m

Observation

36.3 - 108.1m

Recognition

18.2 - 54.4m

Identification

9.1 - 27.2m

Compression

Video Compression

H.264 / H.264+ / H.265 / H.265+ / MJPEG (sub stream)

H.265 Codec Profile

Main

H.264 Codec Profile

Base / Main / High

Video Bit Rate

11 Kbps to 16 Mbps

Multiple Streams

Triple streams

Audio Compression

G.711A, G.711U

Audio Bit Rate

64 Kbps

Image

Maximum Resolution

8MP (3840 × 2160)

Main Stream

50Hz

25 fps 8MP (3840 × 2160);

25 fps 6MP (3200 × 1800);

25 fps 5MP (3072 × 1728);

25 fps 4MP (2560 × 1440);

25 fps 1080P (1920 × 1080)

60Hz

30 fps 8MP (3840 × 2160);

30 fps 6MP (3200 × 1800);

30 fps 5MP (3072 × 1728);

30 fps 4MP (2560 × 1440);

30 fps 1080P (1920 × 1080)

Sub Stream

50Hz

25 fps 720P (1280 × 720);

25 fps D1 (704 × 576);

25 fps CIF (352 × 288)

60Hz

30 fps 720P (1280 × 720);

30 fps D1 (704 × 480);

30 fps CIF (352 × 240)

Third Stream

50Hz

25 fps CIF (352 × 288)

60Hz

30 fps CIF (352 × 240)

Image Settings

Parameters

Brightness / Contrast / Saturation / Hue / Sharpness

Shutter

Auto / Manual, 1/3 to 1/100000 s

Day / Night

IR Cut Filter

WDR

120 dB

Noise Reduction

2D / 3D DNR

Back Light Compensation (BLC)

Supported

High Light Compensation (HLC)

Supported

Region of Interest (ROI)

Supported

Rotation

Supported

*Design and specifications are subject to change without notice - Version 2026-01-23

LGNXD04KIQWA - 4K High IQ Motorized Lens Dome Network Camera

Smart Features	Interface
Basic Events Motion detection, video tampering	Network 1 × RJ45 10/100 Mbps
Smart Events Smart motion detection, line crossing, area intrusion, region entrance/exiting with human/vehicle filtering	On-board Storage Up to 256 GB
Face Detection Supported	Microphone Supported
Scene Change Detection Supported	Speaker N/A
Network	Audio Input / Output 1/1
Storage NAS (NFS, SMB/CIFS), ANR	Alarm Input / Output 1/1
Protocols TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P	Reset Button Supported
Compatibility ONVIF (Profile S, G, T), SDK	General
Security Password protection, strong password, HTTPS encryption, IP filtering, HTTP/HTTPS authentication, TLS 1.1/1.2, WSSE	Operating Conditions -40 °C to 60 °C
Users 40	Humidity ≤ 95% non-condensing
Browsers IE10, IE11; Chrome 57+; Firefox 52+	Power Supply DC12V ± 25%
Mobile iOS, Android	PoE 802.3af
Active Deterrence	Power Consumption Maximum 11 W
Red/Blue Light N/A	Protection IP67, IK10
Sound Warning N/A	Material Metal
	Dimensions Φ142.2 × 116.5 mm
	Weight 1020 g

*Design and specifications are subject to change without notice - Version 2026-01-23

Accessories



XLGNXLB12C/ XLGNXLB12CB
Junction Box



XLGNXPM03
Pole Mount




XLGNXLB07C / XLGNXLB07CB
Wall Mount




XLGNXCM700
Pendant Mount


Montage des accessoires

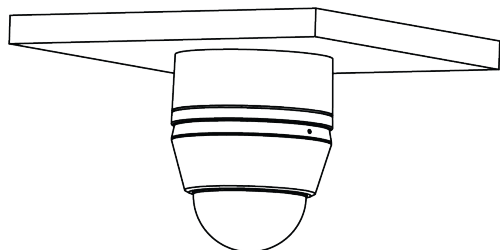


XLGNXLB12C




**XLGNXLB12C
+ XLGNXLB07C**




**XLGNXLB12C
+ XLGNXCM700**



**XLGNXLB12C
+ XLGNXLB07C + XLGNXPM03**



XLGNXPM03



**XLGNXLB12C
+ XLGNXPM03**

*Design and specifications are subject to change without notice - Version 2026-01-23