



4K CHROMAVIEW Turret Network Camera with superior WDR and Fixed lens



- 8MP (4K) High-Resolution Imaging
- 130 dB Superior True WDR Technology
- ChromaView: 24/7 Colour Imaging
- Active Deterrence with Red & Blue lights
- IP67: Water and dust resistant
- Built-in microphone, audio & alarm interface
- Advanced H.265+ Compression



In short

This advanced surveillance camera delivers 8MP high-resolution imaging with 130 dB superior True WDR technology, ensuring clear and balanced footage in challenging lighting conditions. Featuring ChromaView for 24/7 color imaging, active deterrence with red and blue lights, IP67 water and dust resistance, a built-in microphone with audio and alarm interface, and advanced H.265+ compression, it provides reliable security in any environment.

Dimensions

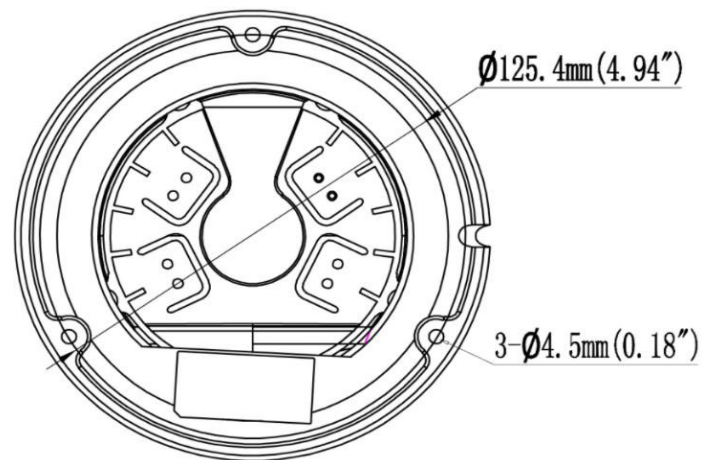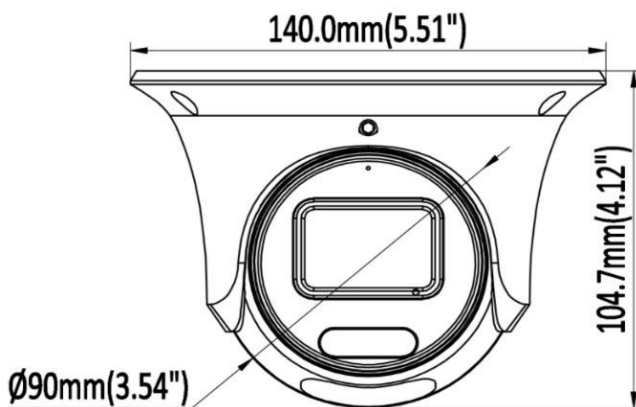

*Design and specifications are subjects to change without notice.

Technical Specifications

Camera: LGNXT04CVWF				
Image Sensor	1/1.8" Progressive Scan CMOS Sensor			
Minimum Illumination	Color: 0.0008 Lux, 0 Lux with light			
Illumination Range	30m / 98.43ft (Warm light)			
Embedded Features	Built-in Mic, Built-in Reset Button, Illuminator (Warm light)			
External Features	DC12V ± 25%			
Viewing Angle	Pan: 0° ~ 360° Tilt: 0° ~ 75° Rotation: 0° ~ 360°			
Lens				
Focal Length	2.8 mm			
Aperture	F1.0			
Field of View	2.8 mm: Horizontal FOV: 111°, Vertical FOV: 60°, Diagonal FOV: 130°			
Thread Mount	M16			
DORI 2.8mm	Detection	Observe	Recognize	Identify
	86m	33.5m	16.7m	8.4m
Camera Image				
Maximum Resolution	8MP (3840 × 2160)			
Frame Rate	Main Stream			
	50Hz: 25fps 8MP (3840 × 2160) , 25fps 6MP (3200 × 1800) , 25fps 5MP (3072 × 1728), 25fps 4MP (2560 × 1440) , 25fps 1080P (1920 × 1080)			
	60Hz: 30fps 8MP (3840 × 2160) , 30fps 6MP (3200 × 1800) , 30fps 5MP (3072 × 1728), 30fps 4MP (2560 × 1440) , 30fps 1080P (1920 × 1080)			
	Sub Stream			
	50Hz: 25fps 720P (1280 × 720), 25fps D1 (704 × 576), 25fps CIF (352 × 288) (Default D1)			
	60Hz: 30fps 720P (1280 × 720), 30fps D1 (704 × 480) , 30fps CIF (352 × 240)			
	Third Stream			
	50Hz: 25fps CIF (352 × 288)			
	60Hz: 30fps CIF (352 × 240)			
Image Calibration	Brightness / Contrast / Hue / Saturation / Sharpness			
Shutter Time	Auto/Manual, 1/3 ~ 1/100000s			
Day/Night	24/7 Chromaview Color Imaging			
Wide Dynamic Range	130 dB			
Digital Noise Reduction	2D/3D DNR			
Supported Features	Backlight Compensation (BLC), Highlight Compensation (HLC), Region of Interest (ROI), Rotation			
Compression				
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG			
H.265 Codec Profile	Main Profile			
H.264 Codec Profile	Base / Main / High profile			
Video Bit Rate	11 Kbps ~ 16 Mbps			
Video Stream	Triple			
Audio Compression	G.711A, G.711U			
Audio Bit Rate	64 Kbps			

*Design and specifications are subjects to change without notice.

Technical Specifications

Intelligent Features	
Standard Events	Motion detection, Video Tampering
Advanced Events	Advanced motion analysis, boundary crossing, zone penetration, sector access, perimeter exit (supports alarm activation based on specified target categories: person and vehicle) and Scene Alteration Detection
Face Detection	Supported
Network	
Network Storage	NAS (NFS, SMB/CIFS), ANR
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P
System Compatibility	Onvif (Profile S, Profile G, T), SDK
Security	Password protection, complex passwords, HTTPS encryption, IP address filtering, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2, WSSE and digest authentication for Open Network Video Interface
Users	Maximum 40 users
Web Browsers	Internet Explorer 10 and 11 need a plug-in for live view support. Chrome 57.0+ and Firefox 52.0+ are required for local service.
Mobile Surveillance	iOS, Android
Hardware	
Ethernet	1 RJ45 10 M/100 M self-adaptive Ethernet port
Storage	Up to 256GB
Audio I/O	1/1
Alarm I/O	1/1
NDAA Compliant	Completely
General	
Working Conditions	-40°C ~ 60°C (-40°F ~ 140°F) Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 25% / PoE (802.3 af)
Power Consumption	Less than 8W
Protection Level	IP67
Material	Metal
Dimensions	Φ 140 × 104.7 mm (Φ 5.51" × 4.12")
Weight	1.92lb / 870g

*Design and specifications are subjects to change without notice.

What you may need



XLGNXLB12C
Junction Box
Φ142 mm × 46.5mm



XLGNXPM03
Pole Mount
Φ170mm × 135.8mm × 43.7mm



XLGNXLB07C
Wall Mount
Φ136mm × 120mm x 208mm




XLGNXCM700
Pendant Mount Bracket
Φ116 mm × 734.5 mm

Accessories Mount


XLGNXLB12C



XLGNXPM03




XLGNXLB07C




**XLGNXPM03 +
XLGNXLB12C**




**XLGNXLB07C +
XLGNXLB12C**




**XLGNXPM03 +
XLGNXLB07C**



**XLGNXLB12C +
XLGNXCM700**



**XLGNXPM03 + XLGNXLB12C +
XLGNXLB07C**



*Design and specifications are subjects to change without notice.