



IP Indoor Monitor

- 7" TFT Resistive touch screen
- IPC surveillance
- Alarm integration
- Embedded 8GB SD card
- Record & Snapshot



Dimensions (mm)

Viewing Area

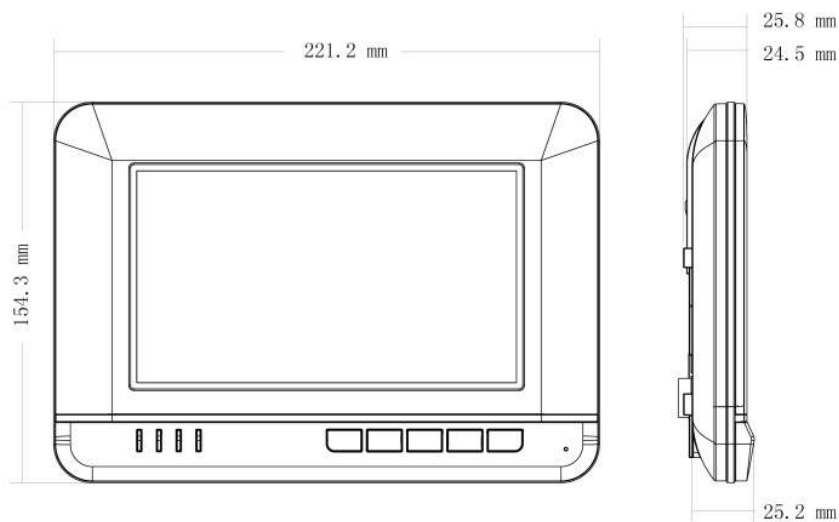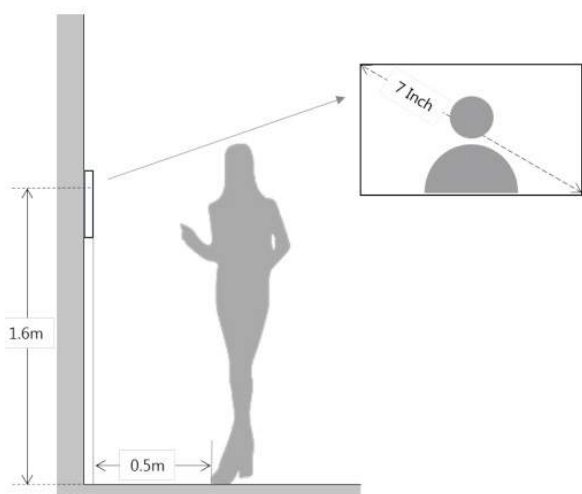

Technical Specifications

| | |
|---------------------|---|
| System | |
| Main Processor | Embedded Micro Processor |
| Operating System | Embedded LINUX OS |
| Video | |
| Video Compression | H.264 |
| Screen | 7" 800x480, Resistive |
| Audio | |
| Audio Compression | G.711 |
| Audio Input | Omnidirectional Microphone |
| Audio Output | Built-in Loudspeaker |
| Bidirectional Talk | Supported |
| Operation Mode | |
| Keypad | Mechanical Buttons |
| Network | |
| Ethernet | 10/100 Mbps Self-adaptive |
| Network Protocol | TCP/IP |
| Interface | |
| Alarm In | 8 Channels |
| Alarm Out | N/A |
| RS485 | N/A |
| General | |
| Memory Slot | Embedded 8GB |
| Installation | Flush |
| Power Consumption | DC 12V, Standby ≤1.5W, Work ≤7W; Supplied Directly by VUNS1060A |
| Working Environment | -10°C to +55°C |
| Dimensions | 221.2mm × 154.3mm × 25.8mm |
| Weight | 0.8Kg |

* Design and specifications are subject to change without notice.