




VUH5441G | Digital VUH (SIP 2.0)

Unify your Security Solution

In a highly fragmented industry, we have grown to become more than just a manufacturer. Time being our clients' more precious asset, we've adapted our methods and business structure to provide them with the best and simplest experience to ensure the protection of people, information and assets.

Application

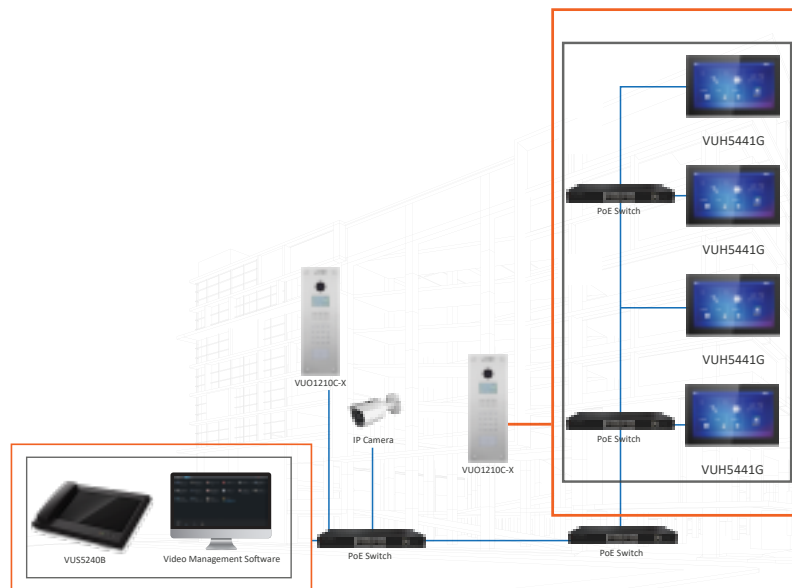

Dimensions



Technical Specifications

System	
Network Protocol	IPv4, FTP, RTSP, RTP, TCP, UDP, SIP
Operating System	Embedded LINUX operating system
Features	
Screen Type	Capacitive Screen
Display	10-inch TFT LCD
Resolution	1024 (H) × 600 (V)
Video Compression	H.264
Audio Compression	G.711a, G.711Mu, G.711u, PCM
Audio Input	1 channel all-direction microphone
Audio Output	1 channel
Audio Mode	Supports dual-way bidirectional talk
Audio Enhancement	Supports echo suppression/DNR
Function	
Communication Mode	Full digital
Leave Videos or Text Messages	Supported
DND Mode	Supported
Sub-station Quantity	9
Edge Storage	Embedded 8 GB
Port	
Alarm Input	6 channels
Alarm Output	1 channel
Doorbell	Supported by every channel
Network	1 RJ-45, 10 M/100 Mbps self-adaptive
Alarm	
SOS Alarm	Supported
General	
Power Supply	Standard PoE; DC 12V 1A
Installation	Surface
Certifications	CE/FCC
Dimensions	260 mm × 170 mm × 28 mm (10.24" × 6.69" × 1.10")
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Operating Humidity	10% RH – 90% RH (No condensation)
Power Consumption	≤ 7W (Work)