


IP Intercom Kit with Surface Mount

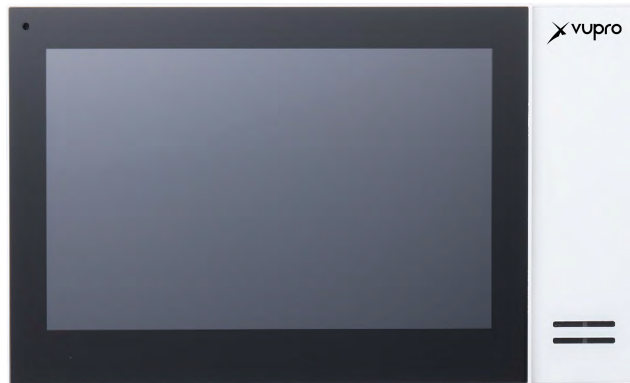

Outdoor Station Features

- 2 Megapixels HD Camera
- Stainless Steel panel
- Night Vision
- Group Call
- 160° angle of view
- Remote Intercom with the mobile application
- Surface mount and Flush mount
- Support standard PoE
- IP55
- IK07

Monitor Features

- 7" TFT Resistive touch screen
- IPC surveillance
- Alarm integration
- Embedded 8GB SD card
- Record & Snapshot
- High Performance

Technical Specifications

VUO2000A




System	
Main Processor	Embedded Processor
Camera	CMOS Low Illumination 2MP HD Colorful
Angle of View	H:160°
WDR	Supported
Focal Length	2mm
Noise Reduction	Noise suppression and echo cancellation
Video Encoding	H.264
Port	
RS-485 Port	1
Audio Input/ Output	1/1
Lock Control	1 set
Power Output	12V/100mA
Alarm Parameter	
Tamper Alarm	Supported
Alarm input/output	Supported
User parameters	
Audio Input	Built-in Omnidirectional Microphone
Audio Output	Built-in Loudspeaker
Storage	Extended 64 G TF Card
Web Configuration	Supported
Real-Time Monitor	Supported
General	
Ingress Protection	IP54, IK07
Installation	Surface Mount
Material	Aluminium
Power Consumption	≤12W
Working Environment	-30°C to +60°C (-22°F to +140°F)
Dimensions	130 mm×96 mm×28.5 mm
Weight	0.35kg

* Design and specifications are subject to change without notice.

Technical Specifications

VUH2421FW-P

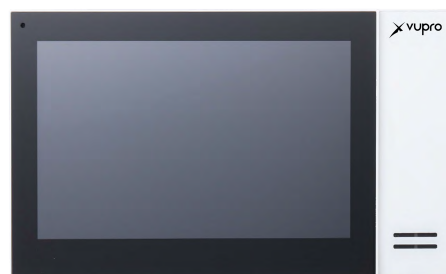

System	
Main Processor	High performace embedded processor
Video	
Video Compression	H.264
Display	7-inch TFT screen
Resolution	1024 × 600
Screen Type	Capacitive screen
Audio	
Audio Compression	G.711A/G.711U/PCM
Audio Input	1 channel all-direction microphone
Audio Output	Built-in 1.5W loudspeake
Audio Bit Rate	16 kbps
Bidirectional Talk	Supported
General	
Network	1 RJ-45
Installation	Surface Mount
Ingress Protection	IP55, IK07
Power Consumption	DC 12V; Standby ≤4W, Working ≤6W
Working Environment	-10°C to +55°C (+14°F to +131°F)
Dimensions	119.6 mm × 221.5 mm × 21.5 mm (4.71" × 8.72" × 0.85")
Weight	0.35 Kg (0.77 lb)

* Design and specifications are subject to change without notice.