



VUO2000A | IP Villa Door Station

Unify your Security Solution

In a highly fragmented industry, we have grown to become more than just a manufacturer. Time being our clients' more precious asset, we've adapted our methods and business structure to provide them with the best and simplest experience to ensure the protection of people, information and assets.

Application




Technical Specifications

System	
Main Processor	Embedded Processor
Video	
Video Compression	H.264
Image Sensor	1/2.8" 2MP CMOS high definition low illumination
Lens	1.95 mm
Angle of View	D:180° H:160° V:82°
WDR	Supported
Frame rate	PAL: 25 fps NTSC: 30 fps
Video bit rate	256K to 2M
Light compensation	IR Supplement
Audio	
Audio Compression	G.711 U
Audio Input	Omnidirectional Microphone
Audio Output	Built-in Speaker
Bidirectional Talk	Supported
Noise reduction	Noise suppression and echo cancellation
Operation Mode	
Tamper Alarm	Supported
Door Sensor Timeout Alarm	Supported
Alarm Input	Supported
Alarm Output	Supported
Interface	
RS-485 Port	1
Alarm Output	1
Lock Control	1 set
Door Status Detection	1 set
Exit Button	1
Tamper Switch	1 set
Network Interface	1
Parameter	
Auto Snapshot	Supported
Leave Videos or Text Messages	Supported
Storage	Extended 64G TF Card
WEB Configuration	Supported
Real-Time Monitor	Supported

Technical Specifications

General	
Ingress Protection	IP65
Updates	Online updates
Material	Aluminum
Power Supply	2-Wire Interface or PoE
Power	12v DC; 1A
Installation	Flush or surface mounted
Working Temperature	-30°C to +60°C (-22°F to +140°F)
Atmospheric Pressure	86kPa–106kPa
Light compensation	IR Supplement
Power Consumption	≤12W
Weight	0.35kg (0.77lbs)

Dimensions

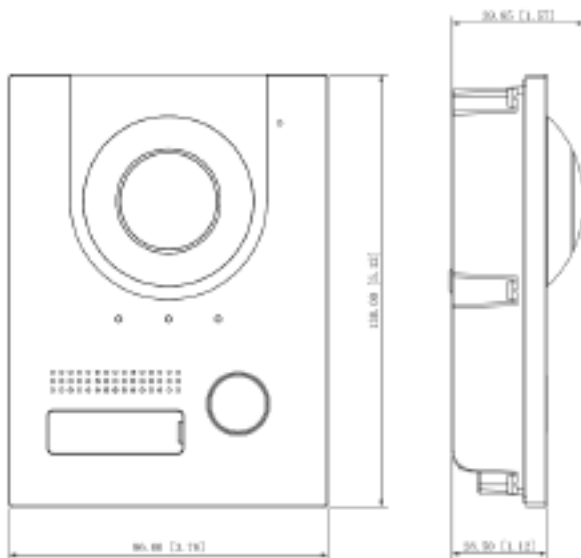

Accessories



VUM114
Flush Mount



VUM115
Surface Mount