





32-Channel Universal Video Recorder (UVR)

- H.265+/H.265 dual-stream video compression
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 32 channels IP camera inputs, each channel up to 6MP*;
Max 128Mbps Incoming Bandwidth
- Smart Search and Intelligent Video System




** IP Cameras Only*

Dimensions

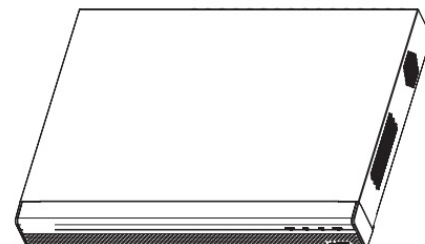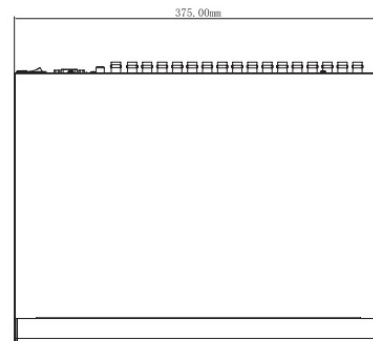

Rear Panel

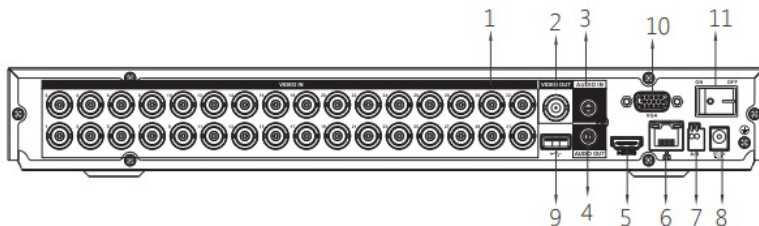

- | | |
|----------------------------|----------------------|
| 1 VIDEO IN | 7 RS485 Interface |
| 2 VIDEO OUT | 8 DC 12V Power Input |
| 3 AUDIO IN, RCA Connector | 9 USB Interface |
| 4 AUDIO OUT, RCA Connector | 10 VGA Interface |
| 5 HDMI Interface | 11 Power Switch |
| 6 Network Interface | |

Technical Specifications

Recording	
Analog Camera Input	32 Channels, BNC
HDCVI Camera	4K, 6MP, 4MP, 1080P at 25/30fps, 720P at 50/60fps, 720P at 25/30fps
AHD Camera	5MP, 4MP, 3MP, 1080P at 25/30, 720P at 25/30fps
TVI Camera	5MP, 4MP, 3MP, 1080P at 25/30, 720P at 25/30fps
CVBS Camera	PAL/NTSC
IP Camera Input	8+4/16+8 Channel, each channel up to 8MP
Audio In/Out	1/1, RCA
Two-way Talk	Reuse audio in/Out, RCA
Recording	
Compression	H.265+/H.265/H.264+/H.264
Resolution	5M-N, 4M-N, 1080P, 1080N, 720P, 960H, D1, CIF
Ethernet	RJ-45 (100/1000Base-T)
Record Rate	Main stream: the 1st & 2nd channels 5M-N(1~10fps), other channels 4M-N/1080P(1~15fps); 1080N/720P/960H/D1/CIF (1~25/30fps) Sub stream: D1/CIF(1~15fps)
Bit Rate	32Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Postrecord: 10 ~ 300 sec
Audio Compression	AAC(only for the 1st channel), G.711A, G.711U, PCM
Audio Sample Rate	8KHz, 16 bit Per Channel
Audio Bit Rate	64Kbps Per Channel
Network	
Interface	1 RJ-45 Port (100M)
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, Wi-Fi, 3G/4G, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Supports Dahua IP camera, DVR, NVS, etc.)
Max. User Access	128 users
Interoperability	CGI Conformant
General	
Power Supply	DC12V/5A
Power Consumption	<25W
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), 10%~ 90% RH
Weight	2.0kg (4.4 lb)
Dimensions	1U, 375mm×287mm×53mm (14.8" x 11.3" x 2.1")

* Design and specifications are subject to change without notice.

Technical Specifications

Recording	
Compression	H.265+/ H.265/ H.264+/ H.264
Resolution	5M-N, 4M-N, 1080P, 1080N, 720P, 960H, D1, CIF
Record Rate	Main stream: 1st & 2nd channels 5M-N(1~10fps), other channels 4M-N/1080P(1~15fps); 1080N/ 720P/ 960H/ D1/ CIF (1~25/30fps)
	Sub stream: D1/CIF(1~15fps)
Bit Rate	32Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Postrecord: 10 ~ 300 sec
Audio Compression	AAC(only for the 1st channel), G.711A, G.711U, PCM
Audio Sample Rate	8KHz, 16 bit Per Channel
Audio Bit Rate	64Kbps Per Channel
Network	
Interface	1 RJ-45 Port (1000M)
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, Wi-Fi, 3G/4G, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Supports Storm IP camera, DVR, NVS, etc.)
Max. User Access	128 users
Interoperability	ONVIF 16.12, CGI Conformant
General	
Power Supply	DC12V/5A
Power Consumption	<25W (Without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), 0~ 90% RH
Weight	2.0kg (4.4 lb) (without HDD)
Dimensions	1U, 375mm × 287mm × 53mm (14.8" x 11.3" x 2.1")

* Design and specifications are subject to change without notice.