

2MP WDR IR Mini Dome Network Camera with Fixed Lens

- 1/2.8" 2 Megapixel Progressive Scan STARVIS™ CMOS
- H.265 & H.264 Triple-Stream Encoding
- 50/60FPS at 1080P (1920×1080)
- Smart Detection Supported
- WDR (120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- Multiple Network Monitoring: Web Viewer, STORM VMS
- 2.8mm Fixed Lens
- Maximum Length of IR LEDs: 30m
- 1/1 Alarm in/out, 1/1 audio in/out
- Micro SD Memory Card, IP67, IK10, PoE
- Outdoor / Indoor



Popular Mounting Solutions



INSX152
Pole

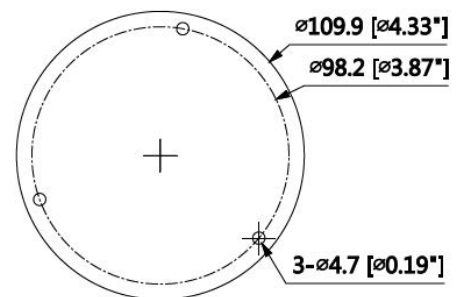
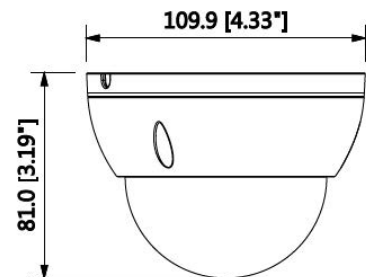



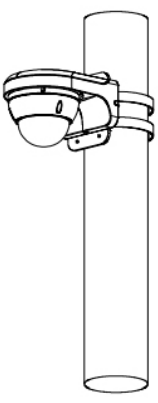

INSX136
Junction Box



INSX203
Wall

Dimensions (mm)



Junction Mount	Pole Mount
INSX136	INSX203 + INSX152
	
Wall Mount	
INSX203	
	

Technical Specifications

Camera					
Image Sensor		1/2.8" 2 Megapixel progressive scan CMOS			
Effective Pixels		1920 (H) x 1080 (V)			
RAM/ROM		256MB / 32MB			
Scanning System		Progressive			
Electronic Shutter Speed		Auto/Manual, 1/3(4)~1/100000s			
Minimum Illumination		0.009 Lux / F2.0 (Color, 1/3s, 30IRE); 0.07 Lux / F2.0 (Color, 1/30s, 30IRE); 0 Lux / F2.0 (IR on)			
S/N Ratio		More than 50dB			
IR Distance		Distance up to 30m (98ft)			
IR On/Off Control		Auto/ Manual			
IR LEDs		24			
Camera Features					
Day/Night		Auto(ICR) / Color / B/W			
Blacklight Compensation		BLC / HLC / WDR(120dB)			
White Balance		Auto/ Natural/ Street Lamp/ Outdoor/ Manual			
Gain Control		Auto/Manual			
Noise Reduction		3D DNR			
Smart IR		Support			
Digital Zoom		16x			
Privacy Masking		4 Areas			
Lens					
Lens Type		Fixed			
Mount Type		Board-in			
Focal Length		2.8mm			
Max. Aperture		F2.0			
Viewing Angle		H: 110°, V:58°			
Focus Control		Fixed			
Pan/Tilt/Rotation		Pan:0°~355°; Tilt:0°~64°; Rotation:0°~355°			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8mm	44m (144ft)	17m (56ft)	9m (30ft)	4m (13ft)

* Design and specifications are subject to change without notice.

Technical Specifications

Video	
Compression	H.265+ / H.265 / H.264+ / H.264
Resolution	1080P (1920 × 1080) / 1.3MP (1280 × 960) / 720P (1280 × 720) / D1 (704 × 576 / 704 × 480) / VGA (640 × 480) / CIF (352 × 288/352 × 240)
Frame Rate	Main Stream: 1080P (1~50/60fps)
	Sub Stream: D1 (1~50/60fps)
	Third Stream: 1080P(1~25/30fps)
Bit Rate	H.264: 24~9472Kbps H.265: 14~5632Kbps
Audio	
Compression	G.711a/G.711Mu/AAC/ G.726
Intelligent Functions	
IVS	Tripwire, Intrusion, Object Abandoned/Missing
Adv. Intelligent Functions	Face Detection
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP
Compatibility	PSIA, CGI
Maximum User Access	10 Users/20 Users
Smart Phone	iOS, Android
Interface	
Video Interface	N/A
Audio Interface	1/1 channel In/Out
RS485	N/A
Alarm	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC
General	
Power Supply	DC12V, PoE (802.3af)(Class 0)
Power Consumption	Less than 5W
Working Environment	-30° C ~ +50° C (-22° F ~ +122° F) / Less than 95% RH
Ingress Protection	IP67
Vandal Protection	IK10
Dimensions	Φ109.9mm × 81mm (4.33" × 3.19")

* Design and specifications are subject to change without notice.