Al 8 MP Vandal Proof Motorized Turret Network Camera w/IR, SD Slot

- High quality image with 8MP, 1/2.7" CMOS sensor
- Starlight ultra-high image quality in low light environments
- H.265+ & H.264 encoding
- 120dB true WDR technology
- Al Features: People Flow Counting and Crowd Density Monitoring
- Supports Micro SD card up to 256GB
- Smart IR, up to 40m (131ft) IR distance



Unify your Security Solution

You asked, we listened. Tailored especially for you, Legend is our **fully NDAA compliant brand**. It offers our latest technologies in a robust build with edge storage capacity. Legend by Inaxsys provides H.265+ compression and easy installation.



This camera responds accurately to specific events in a given area. Our algorithm enables Line Crossing violations, intrusion detection, and much more. Facilitate your viewing experience using on the edge analytics – one product, multiple features.

Wide Dynamic Range

This camera offers vivid imaging in any scenario.
Using industry-leading WDR technology, you'll be able to capture the subject in the most difficult lighting conditions.









^{*}Design and specifications are subjects to change without notice.

Al 8 MP Vandal Proof Motorized Turret Network Camera w/IR, SD Slot

Product Specifications

Camera						
Image Sensor		1/2.8", 8.0 megapixel, progressive scan, CMOS				
Scanning System		Progressive				
Electronic Shutter Speed		Auto/Manual, 1 ~ 1/100,000s				
Minimum Illumination		Color: 0.0025 Lux (F1.6, AGC ON) / 0 Lux with IR on				
S/N Ratio		More than 56dB				
IR Distance		Distance up to 40M (131ft)				
Wide Dynamic Range		120dB				
Camera Featu	res					
Day/Night		IR-cut filter with auto switch (ICR)				
Backlight Compensation		Supported				
White Balance		Auto / Outdoor / Fine Tune / Sodium Lamp / Locked				
Noise Reduction		2D/3D DNR				
Features		HLC; BLC; Dewarping				
Privacy Masking		Up to 4 areas				
OSD		Up to 8 OSDs				
Region of Interest		Up to 8 areas				
Smart IR		Supported				
Motion Detection		Up to 4 areas				
Lens						
Lens Type		Automatic Focusing and Motorized Zoom lens				
Focal Length		2.8 ~ 12mm				
Viewing Angle		H: 107.4°~ 29.2°; 54.2°~ 16.3°; O: 111.0°~33.1°				
Iris Type		N/A				
Pan/Tilt/Rotate		Pan: 0° ~ 360°; Tilt: 0 ~ 75°; Rotate: 0° ~ 360°				
DON	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)	
DORI Distance	2.8	86.9	34.8	17.4	8.7	
J.54466	12	372.4	149.0	74.5	37.2	
Video						
Compression	Compression		H.265+ / H.265 / H.264 / MJPEG			
H.264 code profile		Baseline profile, Main profile, High profile				
Frame Rate		Main Stream: 8MP (3840x2160), Max 20fps; 5MP (3072x1728), Max 30fps; 4MP (2560x1440), Max 30fps; 1080P (1920x1080), Max 30fps				
		Sub Stream: 1080P (1920x1080), Max 30fps; 720P (1280x720), Max 30fps; D1 (720x576), Max 30fps; 640x360, Max 30fps; 2CIF (704x288), Max 30fps; CIF (352x288), Max 30fps				
		Third Stream: D1 (720x576), Max 30fps; 640x360, Max 30fps; 2CIF (704x288), Max 30fps; CIF (352x288), Max 30fps				
Bit Rate	Bit Rate		128 Kbps~16 Mbps			

^{*}Design and specifications are subjects to change without notice.





Al 8 MP Vandal Proof Motorized Turret Network Camera w/IR, SD Slot

Product Specifications

Intelligent Features			
Smart intrusion	Supports false alarm filtering, Line crossing detection, Intrusion detection, Entering/Exiting Area detection		
Statistical Analysis	People counting, support people flow counting and crowd density monitoring		
Events			
Standard Detection	Motion detection, Ultra motion detection, Tampering alarm, Audio detection		
General Function	Watermark, IP address filtering, tampering alarm, access policy, ARP protection, RTSP Authentication, user authentication		
Network			
Ethernet	1 RJ45 10M/100M Base-TX Ethernet		
Security	Password protection, Strong password, HTTPS encryption, Export operation logs, Basic and digest authentication for RTSP, Digest authentication for HTTP, TLS 1.2, WSSE and digest authentication for ONVIF		
VMS	LEGEND VMS, Arkiv, and more		
W.L.D.	Plug-in required live view: IE 10 and above, Chrome 45 and above, Fireforms 52 and above, Edge 79 and above		
Web Browser	Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above		
Protocol	IPv4, IPv6,IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS, SSH		
Compatibility	ONVIF (Profile S, Profile G, Profile T), API, SDK		
Audio			
Audio Compression	G.711		
Suppression	Supported		
Sampling Rate	8KHZ		
Microphone	Built-in Mic		
Storage	·		
Edge Storage	Micro SD slot, up to 256 GB		
Network Storage	ANR		
General			
Power Supply	DC 12V ± 25%, PoE (IEEE 802.3af)		
Power Consumption	Less than 9W		
Working Environment	-30° C to +60° C / Less than 95% RH		
Ingress Protection	IP67 & IK10		
Weight	0.69kg (1.52lb)		
Dimensions	Φ129 x 110mm (Ø5.1" x 4.3")		


^{*}Design and specifications are subjects to change without notice.





AI 8 MP Vandal Proof Motorized Turret Network Camera w/IR, SD Slot

Product Specifications

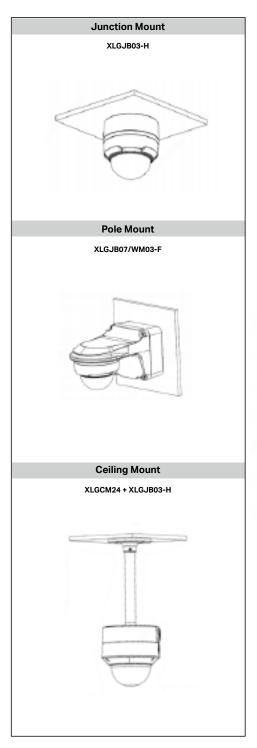





XLGJB07/WM03-F Wall Mount



XLGWM03-B Wall Mount







XLGJB03-H
Junction Box



XLGA01-IN Waterproof Joint



XLGCM24 Ceiling Mount



VUSD256G Micro SD Card





^{*}Design and specifications are subjects to change without notice.