




# 32-Channel Universal Video Recorder (UVR)

- H.265+/H.265 dual-stream video compression
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 32 channels IP camera inputs, each channel up to 6MP\*;  
Max 128Mbps Incoming Bandwidth
- Smart Search and Intelligent Video System




*\* IP Cameras Only*


## Dimensions

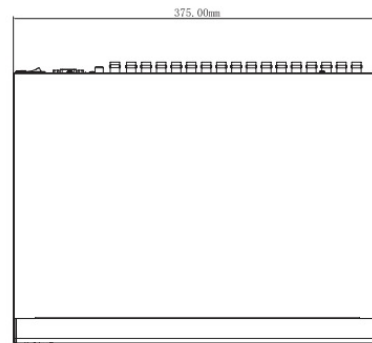

## Rear Panel

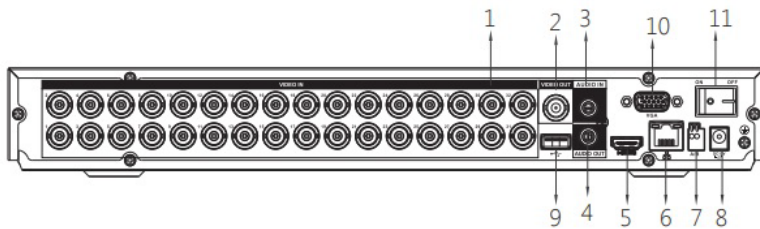

- |                            |                      |
|----------------------------|----------------------|
| 1 VIDEO IN                 | 7 RS485 Interface    |
| 2 VIDEO OUT                | 8 DC 12V Power Input |
| 3 AUDIO IN, RCA Connector  | 9 USB Interface      |
| 4 AUDIO OUT, RCA Connector | 10 VGA Interface     |
| 5 HDMI Interface           | 11 Power Switch      |
| 6 Network Interface        |                      |

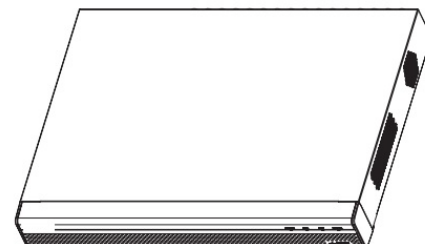

## Technical Specifications

System	
Main Processor	Embedded Processor
Operating System	Embedded LINUX
Display	
Interface	1 HDMI ,1 VGA, 1 TV
Resolution	HDMI:3840×2160, 2560×1440, 1920×1080, 1280×1024, 1280×720 VGA: 1920×1080, 1280×1024, 1280×720
Multi-screen Display	1/4/8/9/16/25/36
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Video Detection and Alarm	
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Diagnosis
Playback and Backup	
Playback	1/4/9/16
Search Mode	Time /Date, Alarm, Motion Detection and Exact Search
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network
Storage	
Internal HDD	2 SATA Ports, up to 10TB capacity
Auxiliary Interface	
USB	2 USB Ports (1 USB 2.0 , 1 USB 3.0)
RS485	1 Port, for PTZ Control
Third-party Support	
Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
Audio and Video	
Analog Camera Input	32 Channel, BNC
HDCVI Camera Input	5MP, 4MP, 1080P at 25/30fps, 720P at 50/60fps, 720P at 25/30fps
AHD Camera	5MP, 4MP, 1080P at 25/30, 720P at 25/30fps
TVI Camera	5MP, 4MP, 1080P at 25/30, 720P at 25/30fps
CVBS Camera	PAL/NTSC
IP Camera Input	32 Channel, each channel up to 6MP
Audio In/Out	1/1, RCA
Two-way Talk	Reuse audio in/out, RCA

\* Design and specifications are subject to change without notice.

## Technical Specifications

Recording	
Compression	H.265+ / H.265 / H.264+ / H.264
Resolution	5M-N, 4M-N, 1080P, 1080N, 720P, 960H, D1, CIF
Record Rate	Main stream: 5M-N (1 to 10fps), 4M-N & 1080P (1 to 15fps); 1080N / 720P / 960H / D1 / CIF (1 to 25/30fps)
	Sub stream: D1 / CIF (1 to 15fps)
Bit Rate	32Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (General, Continuous), Video detection: Motion Detection, Video Loss, Tampering, Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Postrecord: 10 ~ 300 sec
Audio Compression	G.711A, G.711U, PCM
Audio Sample Rate	8KHz, 16 bit Per Channel
Audio Bit Rate	64Kbps Per Channel
Network	
Interface	1 RJ-45 Port (1000M)
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, Wi-Fi, 3G/4G, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Supports STORM IP camera, DVR, etc.)
Max. User Access	128 users
Interoperability	CGI Conformant
General	
Power Supply	DC12V/5A
Power Consumption	Less than 25W (Without HDD)
Working Environment	-10°C to +55°C (+14°F ~ +131°F), 10%~ 90% RH
Weight	2.0kg (4.4 lb) (without HDD)
Dimensions	1U, 375mm×287mm×53mm (14.8" x 11.3" x 2.1")

\* Design and specifications are subject to change without notice.